

10mm Magnetic Track System
48V low Voltage

nelux 
Producing your dreams






Flexibility 



DC 48V SYSTEM
Magnetic track lighting system




M10 Magnetic System 48V

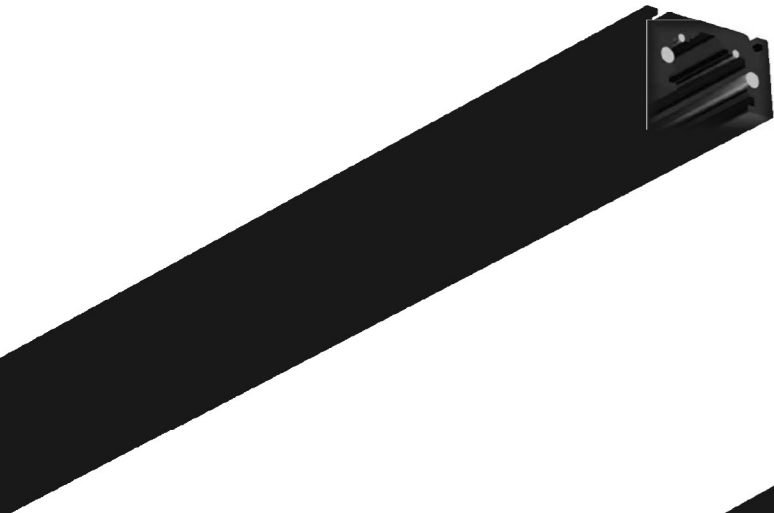


M10-MA



M10-MB




M10-MC




MINI 10mm
DC 48V Magnetic Track System

10mm





M10-MD





DC 48V Micro Track System MAGNETIC TRACK

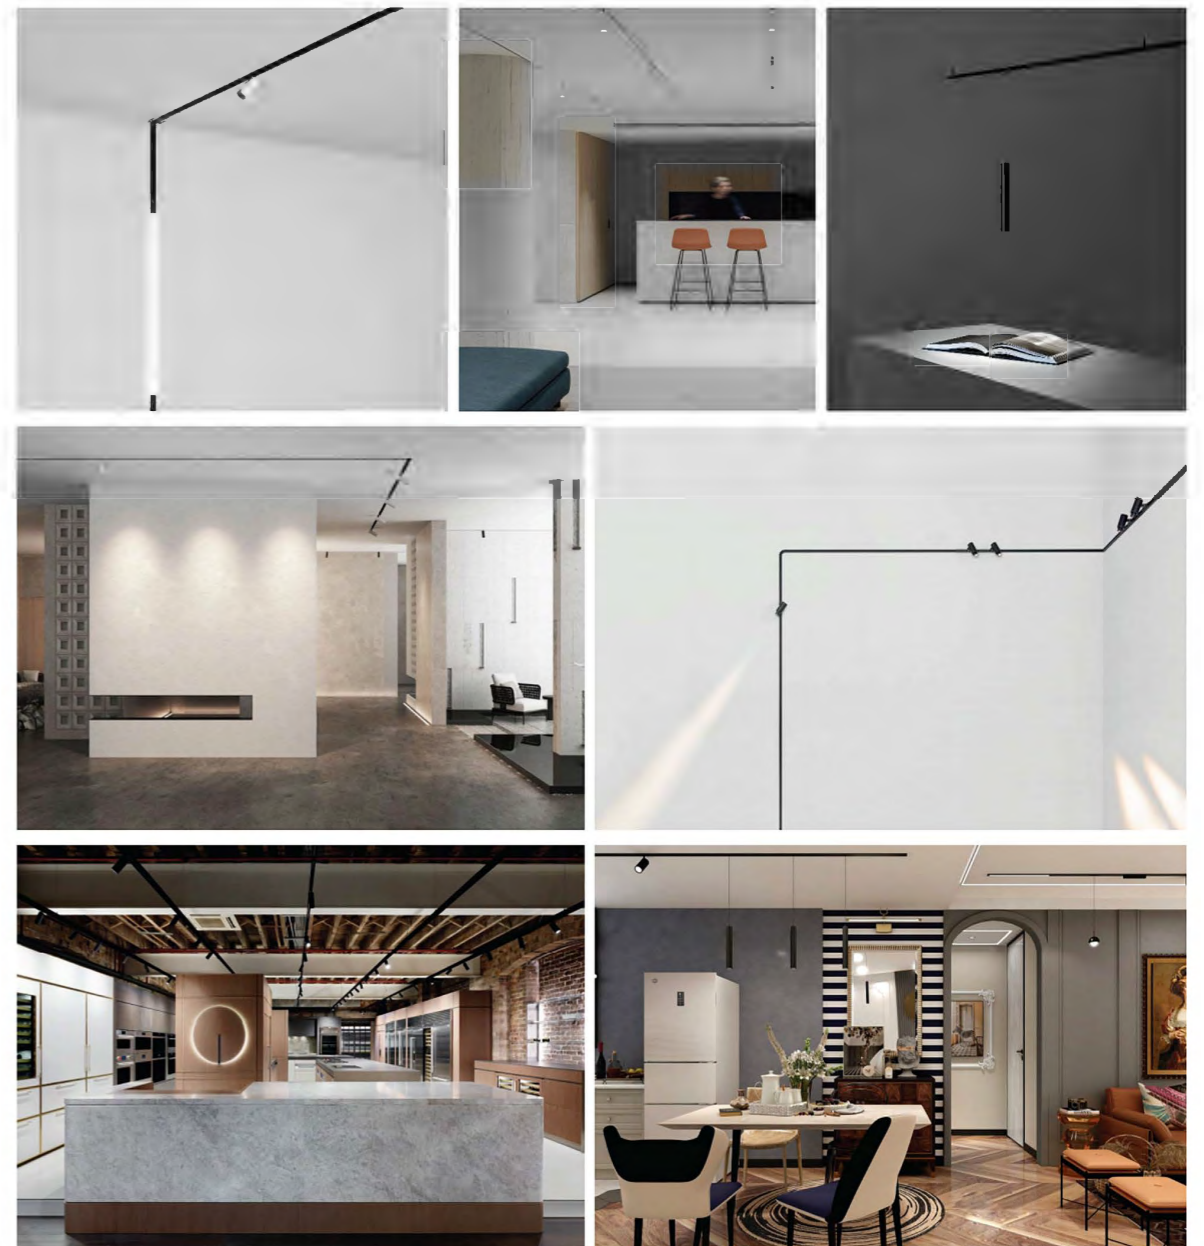

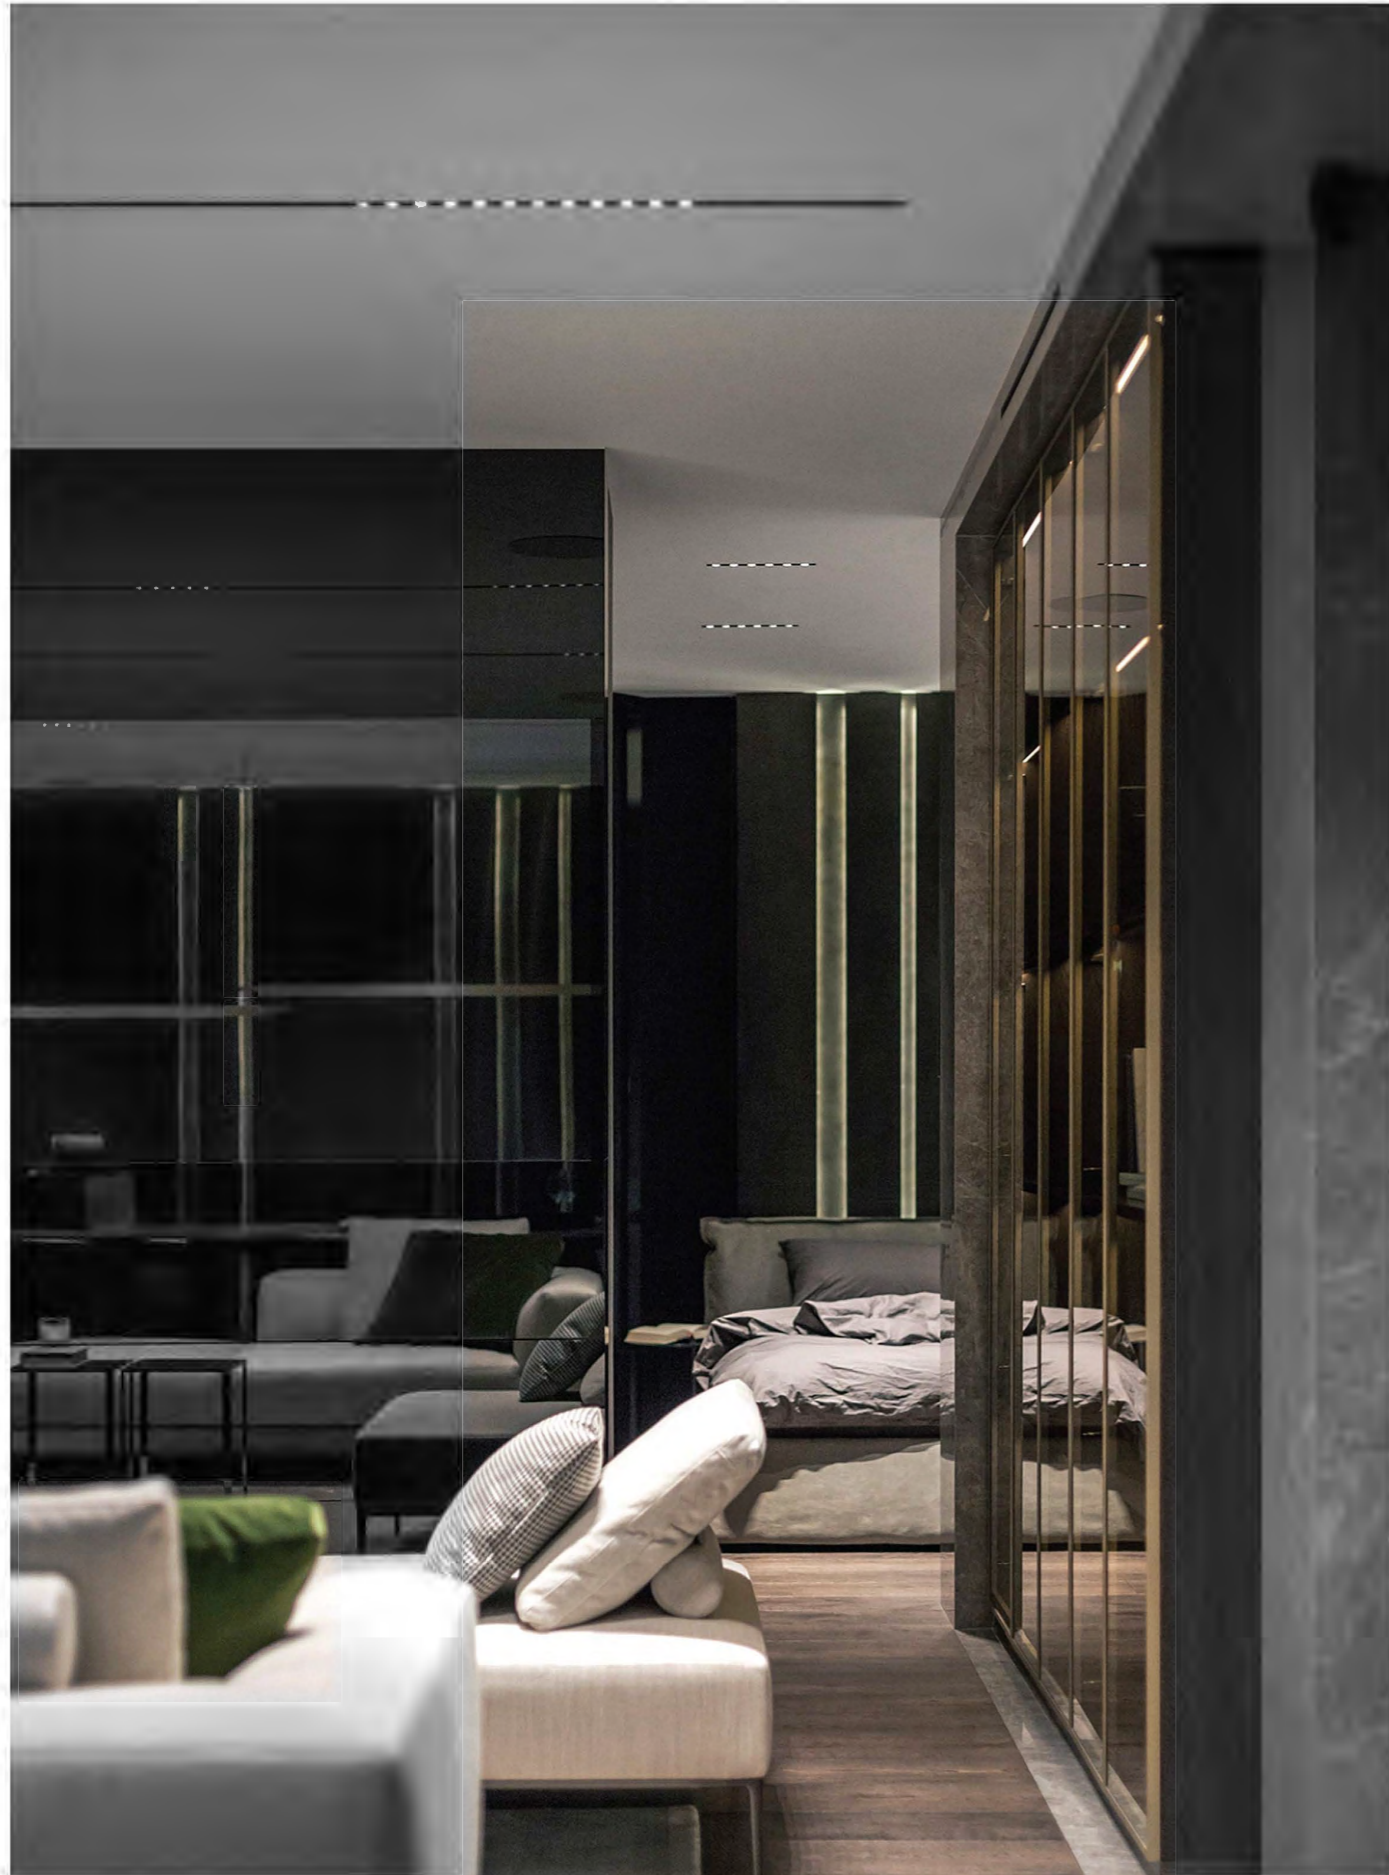

Reference Information



System Power	System Power (W)	Beam Angle (°)	Luminous Flux (LM)	CCT (K)	CRI	Color
M10-6200	6W	15°/24°/36°	300LM	2700/3000/4000K	80/90	○ WH ● BL


○ WH ● BL



Reference Information




System Power	System Power (W)	Beam Angle (°)	Luminous Flux (LM)	CCT (K)	CRI	Color
M10-6201	6W	100°	300LM	2700/3000/4000K	80/90	<input type="radio"/> WH <input type="radio"/> BL




Reference Information


System Power	System Power (W)	Beam Angle (°)	Luminous Flux (LM)	CCT (K)	CRI	Color
M10-6031	6W	12°/24°/38°/45°/60°	480LM	2700/3000/4000K	80/90	○ ● WH BL

System Power	System Power (W)	Beam Angle (°)	Luminous Flux (LM)	CCT (K)	CRI	Color
M10-6032	10W	12°/24°/38°/45°/60°	800LM	2700/3000/4000K	80/90	○ ● WH BL



System Power	System Power (W)	Beam Angle (°)	Luminous Flux (LM)	CCT (K)	CRI	Color
M10-6033	15W	12°/24°/38°	1200LM	2700/3000/4000K	80/90	○ ● WH BL



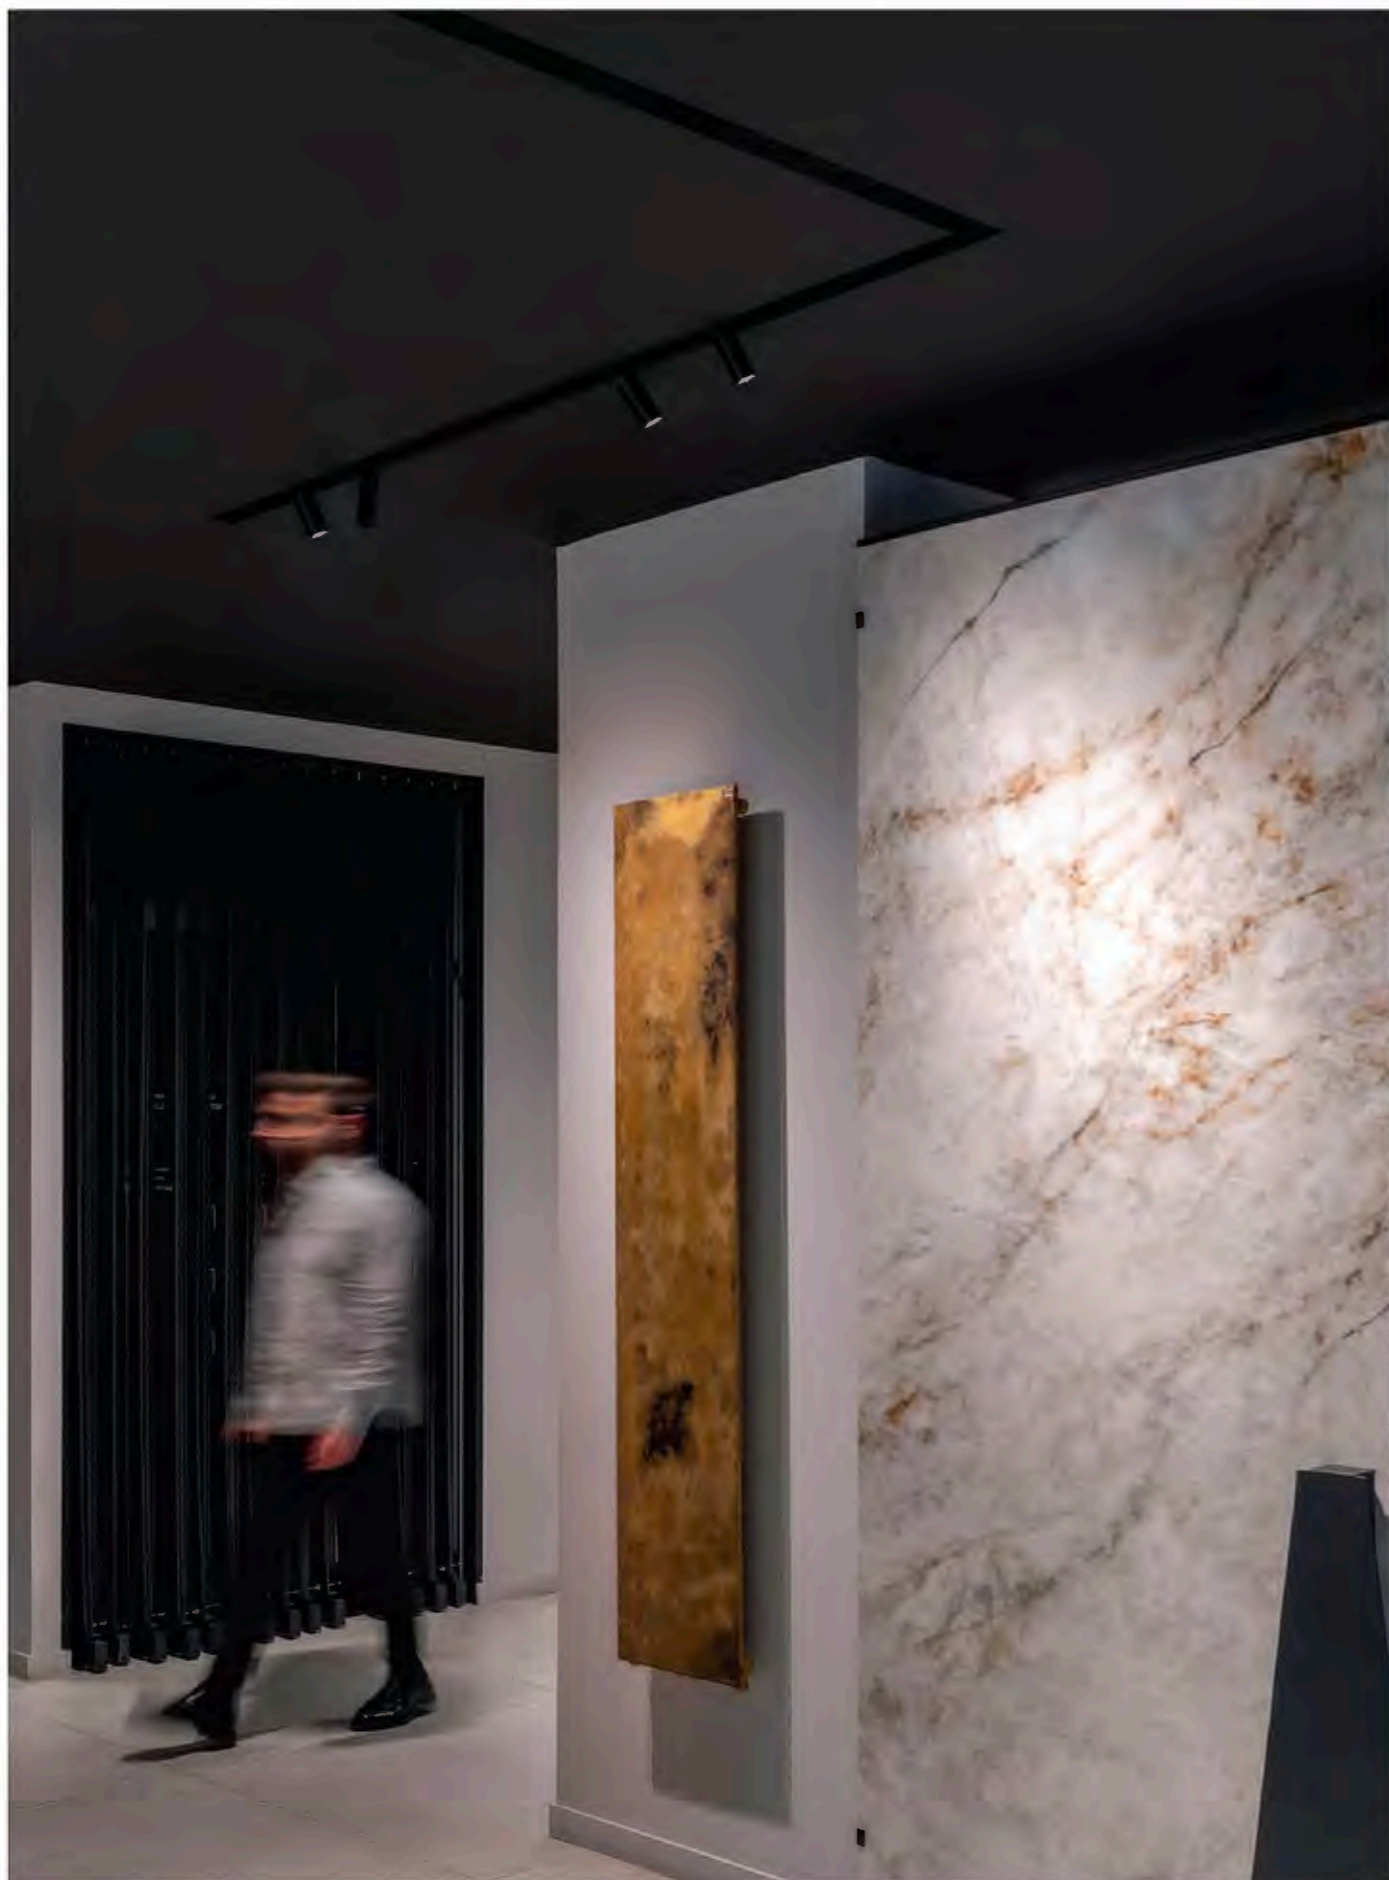


Reference Information

	System Power (W)	System Power (W)	Beam Angle (°)	Luminous Flux (LM)	CCT (K)	CRI	Color
	M10-6022	3W	15°/24°/36°	180LM	2700/3000/4000K	80/90	○ WH ● BL
	M10-6023	4W	15°/24°/36°	240LM	2700/3000/4000K	80/90	○ WH ● BL
	M10-6024	5W	10°/15°/24°/36°/50°	300LM	2700/3000/4000K	80/90	○ WH ● BL
	M10-6025	6W	10°/15°/24°/36°/50°	360LM	2700/3000/4000K	80/90	○ WH ● BL
	M10-6026	10W	10°/15°/24°/36°/50°	600LM	2700/3000/4000K	80/90	○ WH ● BL
	M10-6026B	12W	10°/15°/24°/36°/50°	720LM	2700/3000/4000K	80/90	○ WH ● BL




Reference Information

System Power	System Power (W)	Beam Angle (°)	Luminous Flux (LM)	CCT (K)	CRI	Color
M10-6034	4W	10°/15°/24°/36°/50°	240LM	2700/3000/4000K	80/90	○ WH ● BL




System Power	System Power (W)	Beam Angle (°)	Luminous Flux (LM)	CCT (K)	CRI	Color
M10-6035	8W	10°/15°/24°/36°/50°	480LM	2700/3000/4000K	80/90	○ WH ● BL






Reference Information

System Power	System Power (W)	Beam Angle (°)	Luminous Flux (LM)	CCT (K)	CRI	Color
M10-6030	4W	15°/24°/36°/50°	200LM	2700/3000/4000K	80/90	○ WH ● BL



System Power	System Power (W)	Beam Angle (°)	Luminous Flux (LM)	CCT (K)	CRI	Color
M10-6300	4W	15°/24°/36°/50°	200LM	2700/3000/4000K	80/90	○ WH ● BL



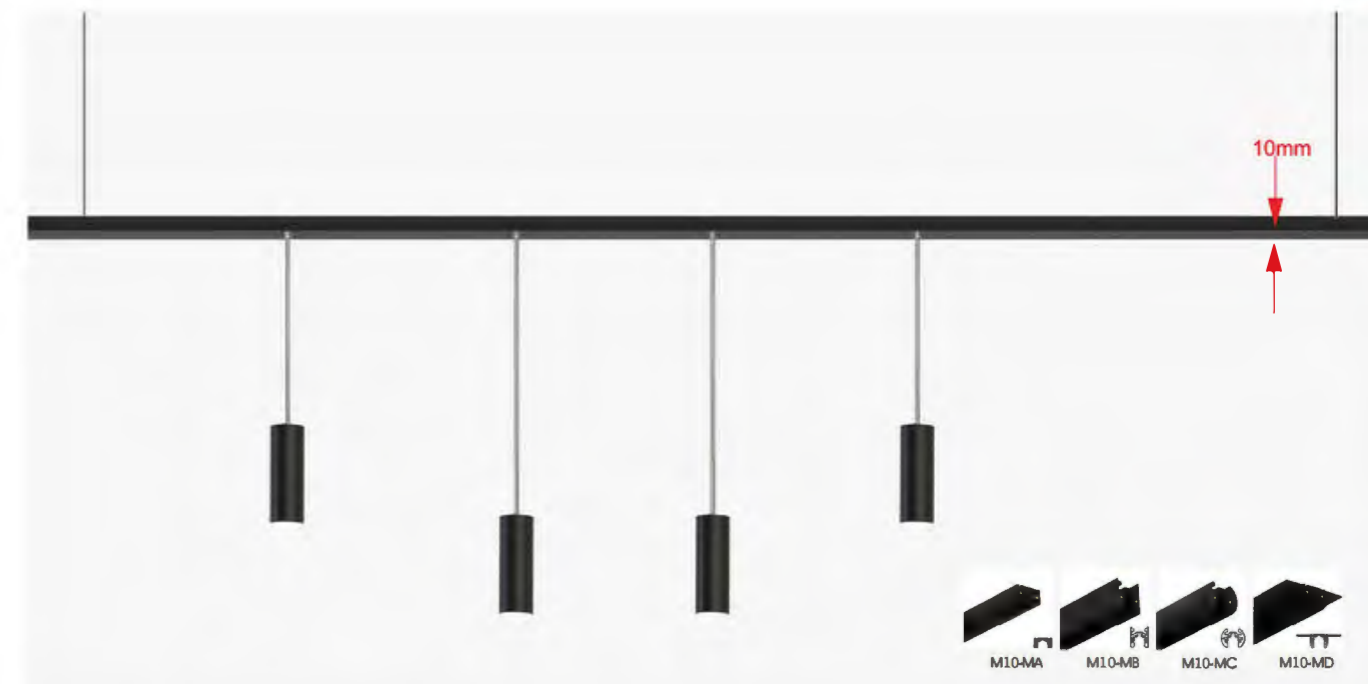

IP20
IP20

UGR
<19

RoHS

CE


F


III

5
GUARANTEE

Reference Information

System Power	System Power (W)	Beam Angle (°)	Luminous Flux (LM)	CCT (K)	CRI	Color
M10-6021	2W	15°/25°/40°	80LM	2700/3000/4000K	80/90	○ WH ● BL



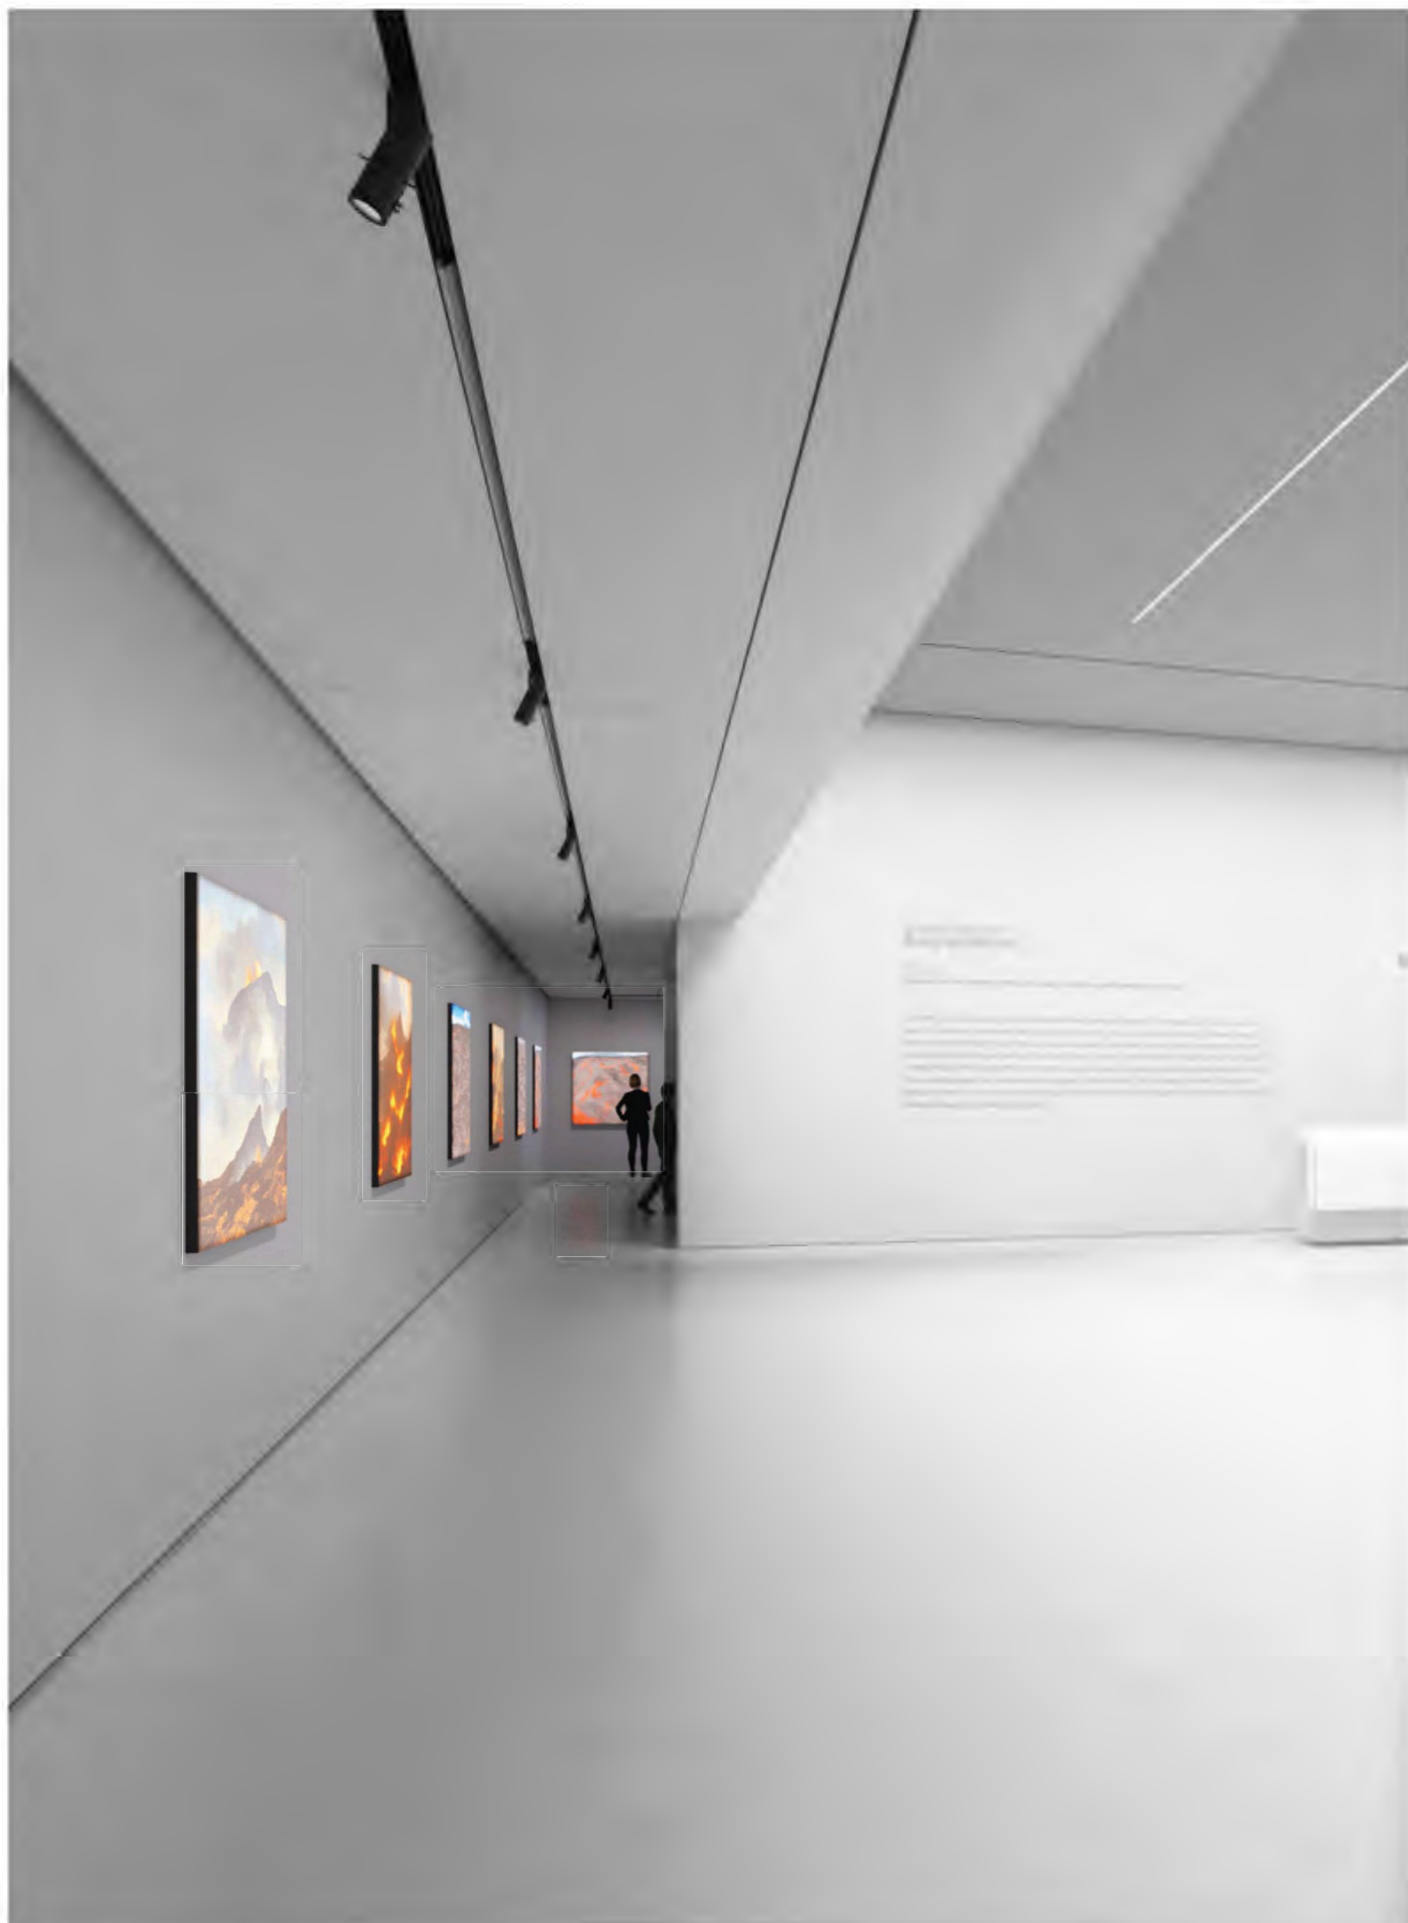

Reference Information

System Power	System Power (W)	Beam Angle (°)	Luminous Flux (LM)	CCT (K)	CRI	Color
M10-6120	3W	8-35°	50LM	2700/3000/4000K	97	<div style="display: flex; justify-content: space-around;"> ○ WH ● BL </div>

THANK YOU
FOR
VISITING OUR
M10 MAGNETIC SYSTEM PRODUCTS

salesnelux@gmail.com

www.nelux.com.hk