

COLLECTION 2020-2024

nelux hong kong international, ltd



**COMMERCIAL & RESIDENTIAL
OUTDOOR LIGHTING**



ARCHITECTURAL LIGHTING

CEILING LIGHT

hotel
shops
home
office
cafe....

CEILING SURFACE

nelux architectural lighting

Our CEILING SURFACE products are made from Aluminium Die-casting, electrostatic powder coating, and aluminum Reflectors made from Aluminium anodized specular silver, PMMA and different materials, to achieve the right parameters for each project.

Brand of Chip CREE and other brands like Citizen and Bridgelux available, Led Driver Khün, Xz, Osram, Philips.

Input Voltage Multivoltage and 220-240VAC/50-60Hz



SM100105 10W
SM100130 15W



SM100115 10W
SM100132 15W



CS63205 10W
CS76235 16W
CS90265 25W



CS60155 10W



CS85173 21W



CS111168SMT 11W



CS8598 11W



CS8598SMT 6W



CS135102SMT 16W



SM100100 18W



CS95130 10W, 15W
CS135188 15W, 20W, 25W
CS 160200 25W, 30W, 35W



CS95130S10W, 15W
CS135188S 15W, 20W, 25W
CS 160200S 25W, 30W, 35W



Ceiling surface, Belly series,
reference SM100132 15W
finished in white color


CEILING SURFACE



SM100105 and SM100130


The lamp housing is made from aluminum, frame form die-casting paint sprayed in white or black/Fabricado en aleación de aluminio, acabados en blanco y negro
 Light Source/ Fuente de Luz COB Cree, Citizen, Bridgelux
 Power/Potencia 10W ~625lm, 15W ~925lm
 CRI/IRC >80 (90,95 and/y 97 as an option/ opcional)
 CCT/Temperatura color 2700K, 3000K, 4000K, 5000K
 Beam angle/Angulo apertura 25°, 40°, 50°
 OPTIONS/OPCIONES *Fix or Tiltable/Fijo o basculante
 *triac dimmable, 0/1-10V, DALI

Applications/Aplicaciones: Hotel, Apartments, Villas, Residences, Restaurants, Cafe, Home, ...




nelux architectural lighting


SM100105

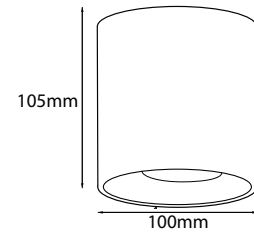

SM100130

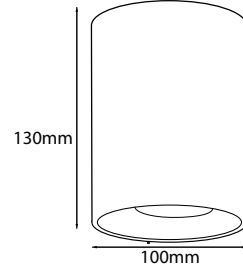


SM100115

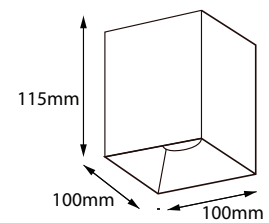


SM100115 and SM100132

The lamp housing is made from aluminum, frame form die-casting paint sprayed in white or black/Fabricado en aleación de aluminio, acabados en blanco y negro
 Light Source/ Fuente de Luz COB Cree, Citizen, Bridgelux
 Power/Potencia 10W ~636lm, 15W ~980lm
 CRI/IRC >80 (90,95 and/y 97 as an option/ opcional)
 CCT/Temperatura color 2700K, 3000K, 4000K, 5000K
 Beam angle/Angulo apertura 25°, 40°, 50°
 OPTIONS/OPCIONES *Fix or Tiltable/Fijo o basculante
 *triac dimmable, 0/1-10V, DALI


Applications/Aplicaciones: Hotel, Apartments, Villas, Residences, Restaurants, Cafe, Home, ...



SM100132




BELLY SERIES

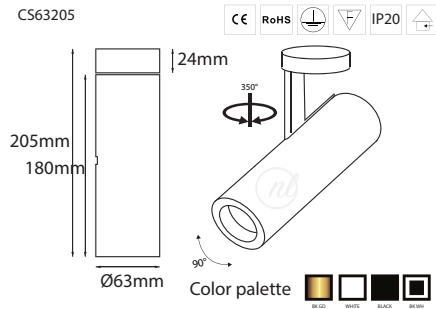

CS63205

Input Voltage AC220-240V, Multivoltage
 Light Power 10W
 Luminous flux ~725lm
 Light Source CREE COB
 CCT 2700K, 3000K, 4000K, 5000K
 CRI 80 as standard, CRI90, CRI97
 Beam Angle 18°, 24°, 38°, 60°
 Output DC36V 300mA

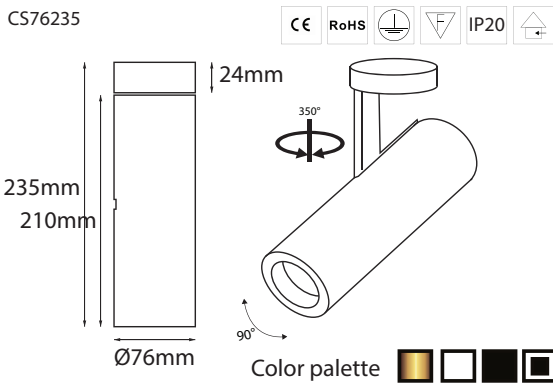


CS76235

Input Voltage AC220-240V, Multivoltage
 Light Power 16W
 Luminous flux ~1140lm
 Light Source CREE COB
 CCT 2700K, 3000K, 4000K, 5000K
 CRI 80 as standard, CRI90, CRI97
 Beam Angle 18°, 24°, 38°
 Output DC36V 450mA

CS90265

Input Voltage AC220-240V, Multivoltage
 Light Power 25W
 Luminous flux ~1800lm
 Light Source CREE COB
 CCT 2700K, 3000K, 4000K, 5000K
 CRI 80 as standard, CRI90, CRI97
 Beam Angle 18°, 24°, 38°
 Output DC36V 700mA

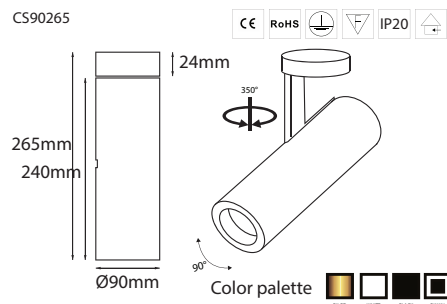



CANY SERIES

CS60155

Input Voltage AC220-240V, Multivoltage
 Light Power 10W
 Luminous flux ~900lm
 Light Source CREE COB
 CCT 2700K, 3000K, 4000K, 5000K
 CRI 80 as standard, CRI90, CRI97
 Beam Angle 18°, 24°, 38°, 60°
 Output DC36V 300mA




HOT SERIES

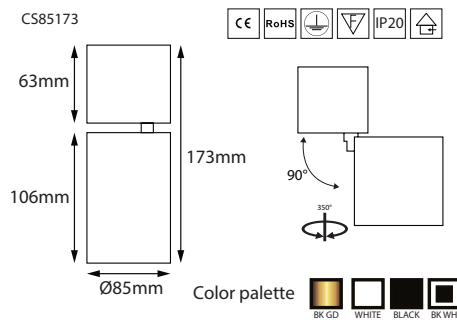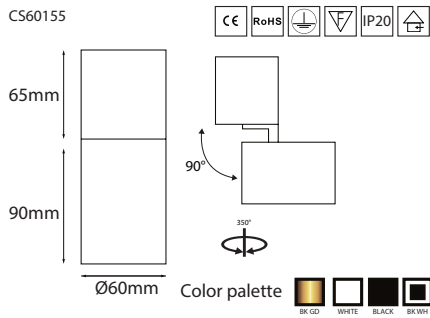

CS85173

Input Voltage AC220-240V, Multivoltage
 Light Power 21W
 Luminous flux ~1900lm
 Light Source CREE COB
 CCT 2700K, 3000K, 4000K, 5000K
 CRI 80 as standard, CRI90, CRI97
 Beam Angle 15°, 30°, 40°
 Output DC36V 600mA

PILL SERIES

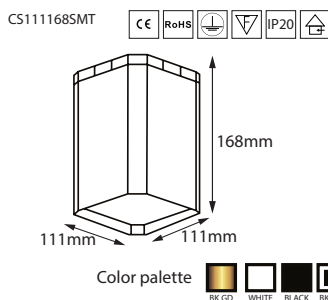

CS111168SMT


Input Voltage AC220-240V, Multivoltage
 Light Power 11W
 Luminous flux ~840lm
 Light Source SMT led osram
 CCT 2700K, 3000K, 4000K, 5000K, 6500K
 CRI 80
 Beam Angle 90°
 Output DC36V 300mA



BALI SERIES


CS8598

Input Voltage AC220-240V, Multivoltage
 Light Power 11W
 Luminous flux ~840lm
 Light Source CREE COB
 CCT 2700K, 3000K, 4000K, 5000K
 CRI 80 as standard, CRI90, CRI97
 Beam Angle 15°, 24°, 40°
 Output DC36V 300mA

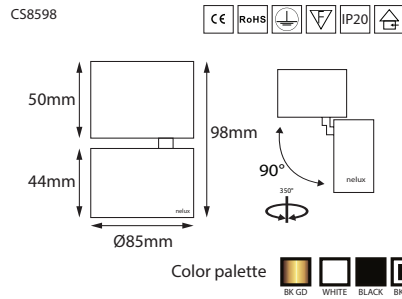


CS8598SMT

Input Voltage AC220-240V, Multivoltage
 Light Power 6W
 Luminous flux ~560lm
 Light Source SMT led edison
 CCT 2700K, 3000K, 4000K, 5000K, 6500K
 CRI 80
 Beam Angle 90°
 Output DC21V 300mA

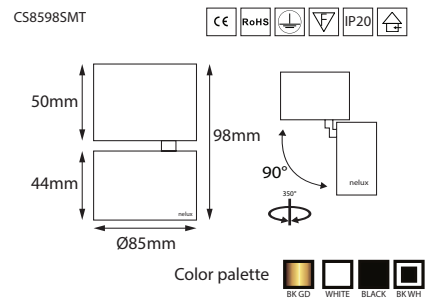

CS135102SMT

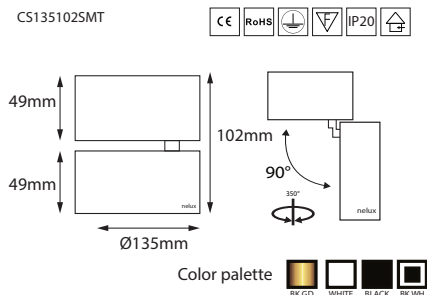

CS135102SMT

Input Voltage AC220-240V, Multivoltage
 Light Power 16W
 Luminous flux ~1500lm
 Light Source SMT led edison
 CCT 2700K, 3000K, 4000K, 5000K, 6500K
 CRI 80
 Beam Angle 90°
 Output DC36V 450mA


SM100100



The lamp housing is made from aluminum, frame form die-casting paint sprayed.
Light Source/ Fuente de Luz COB Cree, Citizen, Bridgelux
Power/Potencia 18W ~1160lm
CRI/IRC >80 (90,95 and/y 97 as an option/ opcional)
CCT/Temperatura color 2700K, 3000K, 4000K, 5000K
Beam angle/Angulo apertura 40°
OPTIONS/OPCIONES
*triac dimmable, 0/1-10V, DALI

Applications/Aplicaciones: Hotel, Apartments, Villas, Residences, Restaurants, Cafe, Home, ...

SM100100

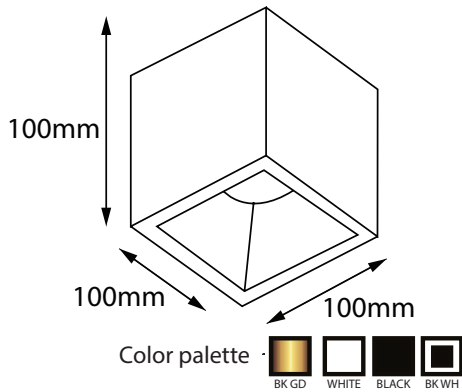




CS135188

Input Voltage AC220-240V, Multivoltage
 Light Power 15W, 20W and 25W
 Luminous flux 1m and ~1070lm, ~1600lm, ~2020lm
 Light Source CITIZEN led
 CCT 2700K, 3000K, 4000K
 CRI>90 as standard CRI>97 as an option
 Beam Angle 17°, 25°, 36°, 60°




Color palette

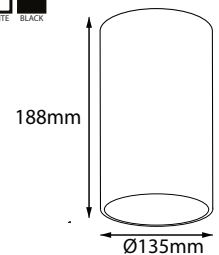

CS95130



Color palette




CS95130

Input Voltage AC220-240V, Multivoltage
 Light Power 10W and 15W
 Luminous flux ~650lm and ~1070lm
 Light Source CITIZEN led
 CCT 2700K, 3000K, 4000K
 CRI>90 as standard CRI>97 as an option
 Beam Angle 17°, 25°, 36°, 60°



Color palette

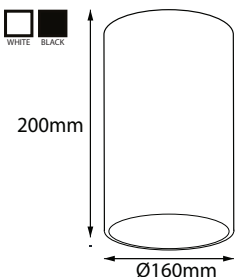

CS160200

Input Voltage AC220-240V, Multivoltage
 Light Power 25W, 30W and 35W
 Luminous flux 1m and ~2020lm, ~2550lm, ~ 2870lm
 Light Source CITIZEN led
 CCT 2700K, 3000K, 4000K
 CRI>90 as standard CRI>97 as an option
 Beam Angle 17°, 25°, 36°, 60°


BEAUTY SERIES



CS95130S



Color palette



CS95130S

Input Voltage AC220-240V, Multivoltage
 Light Power 10W and 15W
 Luminous flux ~650lm and ~1070lm
 Light Source CITIZEN led
 CCT 2700K, 3000K, 4000K
 CRI>90 as standard CRI>97 as an option
 Beam Angle 17°, 25°, 36°, 60°


CS135188S

Input Voltage AC220-240V, Multivoltage
 Light Power 15W, 20W and 25W
 Luminous flux 1m and ~1070lm, ~1600lm, ~2020lm
 Light Source CITIZEN led
 CCT 2700K, 3000K, 4000K
 CRI>90 as standard CRI>97 as an option
 Beam Angle 17°, 25°, 36°, 60°

CS135188S




Color palette

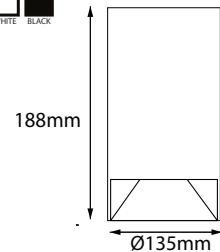

CS160200S



Color palette

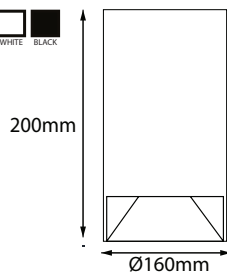

CS160200S

Input Voltage AC220-240V, Multivoltage
 Light Power 25W, 30W and 35W
 Luminous flux 1m and ~2020lm, ~2550lm, ~ 2870lm
 Light Source CITIZEN led
 CCT 2700K, 3000K, 4000K
 CRI>90 as standard CRI>97 as an option
 Beam Angle 17°, 25°, 36°, 60°

BEAUTY SERIES



PF25055 Ceiling Surface Bulkhead

Input Voltage AC220-240V, Multivoltage

Light Power 12W

Luminous flux ~1200lm

Light Source SMD led

CCT 3000K, 4000K

CRI>80 as standard

Beam Angle 180°


Interchange Bezels: polish chrome, stain nickle, black or any other OEM colour available.

Optional: Dimmable, CCT change, Sensor,

PF25055



Color palette

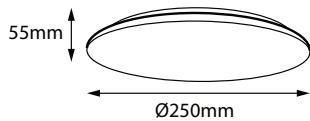

Cover color



PF30055 Ceiling Surface Bulkhead

Input Voltage AC220-240V, Multivoltage

Light Power 18W

Luminous flux ~1800lm

Light Source SMD led

CCT 3000K, 4000K

CRI>80 as standard

Beam Angle 180°


Interchange Bezels: polish chrome, stain nickle, black or any other OEM colour available.

Optional: Dimmable, CCT change, Sensor, Emergency

PF30055



Color palette

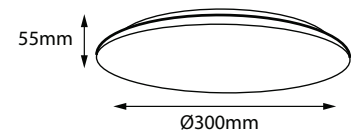


Cover color



PF38055



Color palette

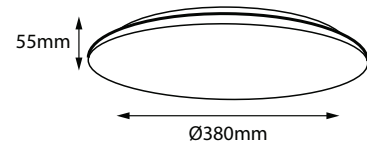

Cover color



PF38055 Ceiling Surface Bulkhead

Input Voltage AC220-240V, Multivoltage

Light Power 25W

Luminous flux ~2500lm

Light Source SMD led

CCT 3000K, 4000K

CRI>80 as standard

Beam Angle 180°

Interchange Bezels: polish chrome, stain nickle, black or any other OEM colour available.

Optional: Dimmable, CCT change, Sensor, Emergency

THINY SERIES