



nelux

Producing your dreams

RECESSED SPOT LIGHT

PRODUCT INDEX



LUMICORE25
001-004



NOVABEAM35
005-010




ECLIPSE34
011-014



ZENLIGHT91
015-018



PUREGLOW92
019-022

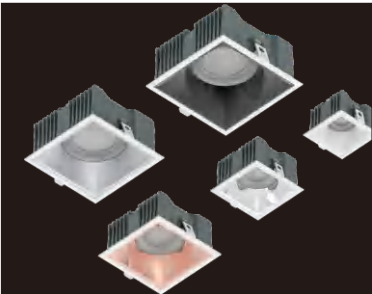

NEOSPOT49
023-032



VERO28
033-036



STELLA84
037-042



LUXEDGE36
043-056



CRISPLIGHT39
057-058



LUMICORE25

SMALL HOLE LIGHT MORE ANTI-GLARE

Simple design style, with all aluminum die-cast lamp body,
Highlight product quality and texture from the details;
Small aperture, narrow light Angle, more accurate light control, more accurate and delicate lighting,
Beam Angle $> 60^{\circ}$, UGR < 6 , very anti-glare,
To maximize the quiet and elegant space lighting atmosphere.
After the lamp shade face ring is installed, it is integrated with the ceiling.
TO meet the different design styles,
Suit to professional grade, decorative grade high demand lighting."





			LED brand: Luminus CCT: 2700K/3000K/4000K CRI: Ra>90 Size: Φ40x61	Material: aluminum Power: 5W Voltage & Current: 36V Cutout: Φ35	Beam angle: 24°/36° Mains voltage: 220-240V 50/60Hz Description: Downlight Luminousflux: 180LM
			LED brand: Luminus CCT: 2700K/3000K/4000K CRI: Ra>90 Size: Φ50x63	Material: aluminum Power: 7W Voltage & Current: 36V Cutout: Φ45	Beam angle: 24°/36° Mains voltage: 220-240V 50/60Hz Description: Downlight Luminousflux: 230LM
			LED brand: Luminus CCT: 2700K/3000K/4000K CRI: Ra>90 Size: Φ60x71	Material: aluminum Power: 9W Voltage & Current: 36V Cutout: Φ55	Beam angle: 24°/36° Mains voltage: 220-240V 50/60Hz Description: Downlight Luminousflux: 260LM
			LED brand: Luminus CCT: 2700K/3000K/4000K CRI: Ra>90 Size: Φ70x71	Material: aluminum Power: 12W Voltage & Current: 36V Cutout: Φ65	Beam angle: 24°/36° Mains voltage: 220-240V 50/60Hz Description: Downlight Luminousflux: 390LM

blackwhite



NOVABEAM35

MASKS ARE AVAILABLE IN DIFFERENT SETS OF COLORS AND PLATING COLORS

Minimalist smooth design, rigid and soft interpretation of pure beauty.
There are different sets of colors and plating colors to choose from to meet the needs of different Spaces.
Pure light and precise light control create a quiet space atmosphere.







LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra > 90

Size:
Φ61x67

Material:
aluminum

Power:
7W

Voltage & Current:
36V



Cutout:
Φ55

Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
650LM



LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra > 90

Size:
Φ80x72

Material:
aluminum

Power:
12W

Voltage & Current:
36V

Cutout:
Φ75

Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
950LM




ECLIPSE34

RADIATOR VERY RICH COLOR

Small size, delicate process, thickened
aviation aluminum heat faster and more durable.
The radiator has different color options to meet the needs
of different design styles.
Excellent lighting quality, ultimate anti-glare design









LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ84x44

Material:
aluminum

Power:
12W

Voltage & Current:
36V


Cutout:
Φ75

Beam angle:
24°/36°/50°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
950LM





LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ80x55

Material:
aluminum

Power:
12W

Voltage & Current:
36V



Cutout:
Φ75

Beam angle:
24°/36°/50°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
950LM

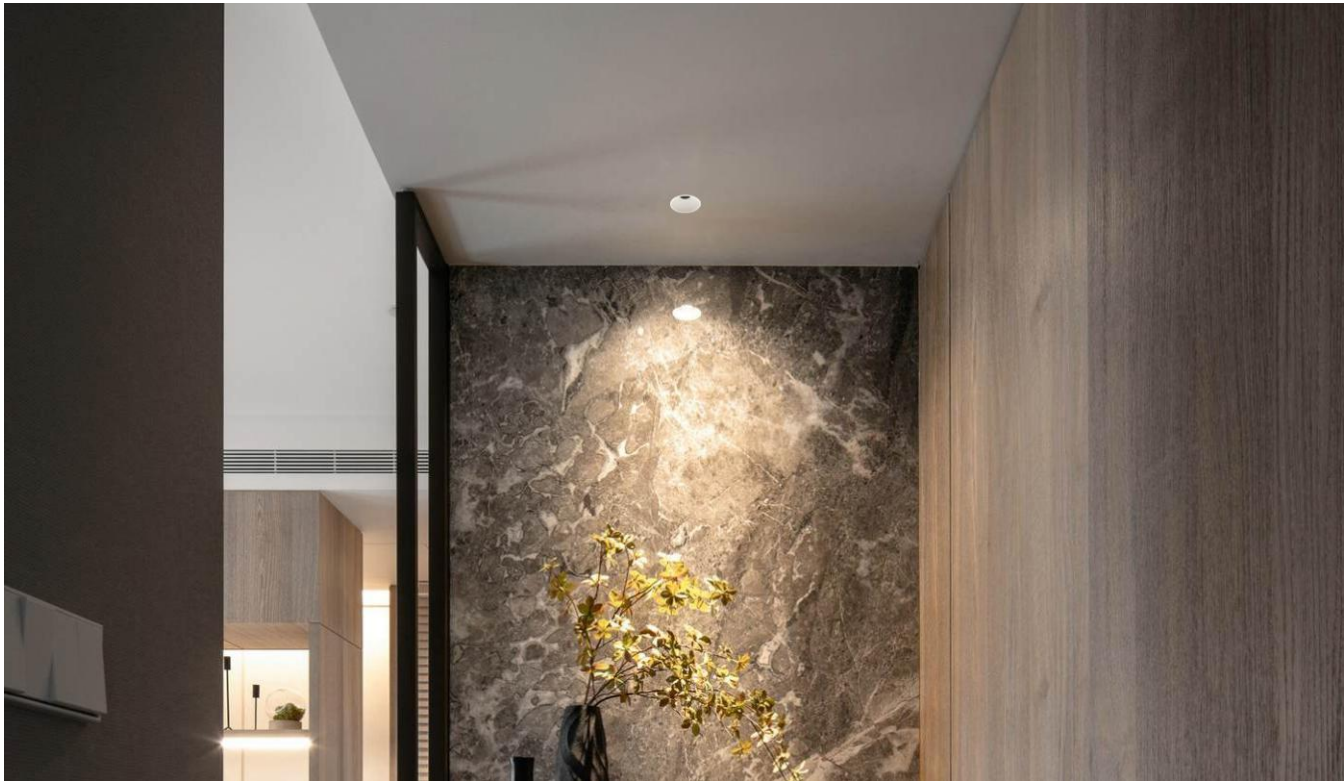

ZENLIGHT91



WATERPROOF RECESSED SPOT LIGHT

Suitable for bathroom, bathroom, kitchen and other
places with high humidity,
Excellent light efficiency, 15° /24° /36° /50° , many angle
options,
Suitable for professional grade decoration grade needs.



IP54





LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ62x58

Material:
aluminum

Power:
7W

Voltage & Current:
36V



Cutout:
Φ55

Beam angle:
15°/24°/36°/50°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
400LM



LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ83x62

Material:
aluminum

Power:
12W

Voltage & Current:
36V



Cutout:
Φ75

Beam angle:
15°/24°/36°/50°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
800LM



LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ105x74

Material:
aluminum

Power:
18W

Voltage & Current:
36V

Cutout:
Φ95

Beam angle:
15°/24°/36°/50°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
1200LM



PUREGLOW92


This series exquisite craft, simple style atmosphere, IP54 waterproof design,


Suitable for bathroom, bathroom, kitchen and other places with high humidity,

Excellent light efficiency, 15° /24° /36° /50° , many angle options, Suitable for professional grade decoration grade needs



IP54 WATERPROOF RECESSED SPOT LIGHT

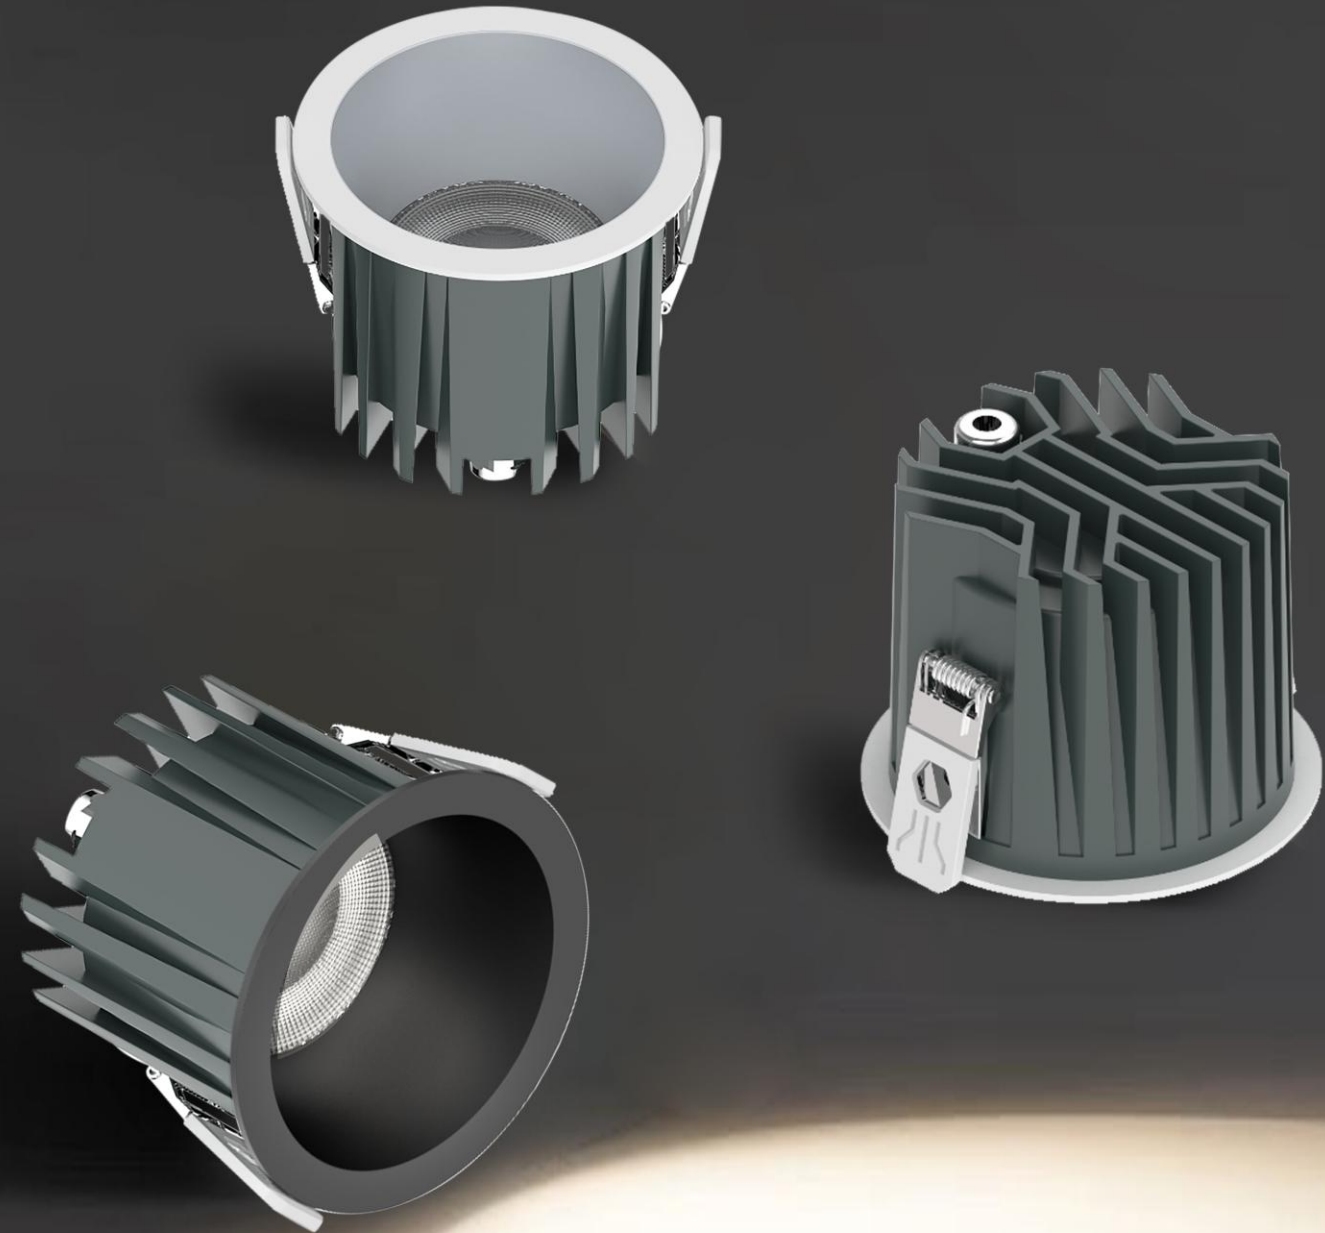











LED brand:
SANAN

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ83x65

Material:
aluminum

Power:
12W

Voltage & Current:
36V


Cutout:
Φ75

Beam angle:
50°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
1200LM











LED brand:
SANAN

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ160x80

Material:
aluminum

Power:
36W

Voltage & Current:
36V


Cutout:
Φ150

Beam angle:
50°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
3900LM











LED brand:
SANAN

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ103x70

Material:
aluminum

Power:
20W

Voltage & Current:
36V


Cutout:
Φ95

Beam angle:
50°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
2000LM











LED brand:
SANAN

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ180x85

Material:
aluminum

Power:
45W

Voltage & Current:
36V



Cutout:
Φ170

Beam angle:
50°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
5000LM











LED brand:
SANAN

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ132x75

Material:
aluminum

Power:
30W

Voltage & Current:
36V

Cutout:
Φ125

Beam angle:
50°


Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
2900LM





WATERPROOF
RECESSED SPOT LIGHT
IP54

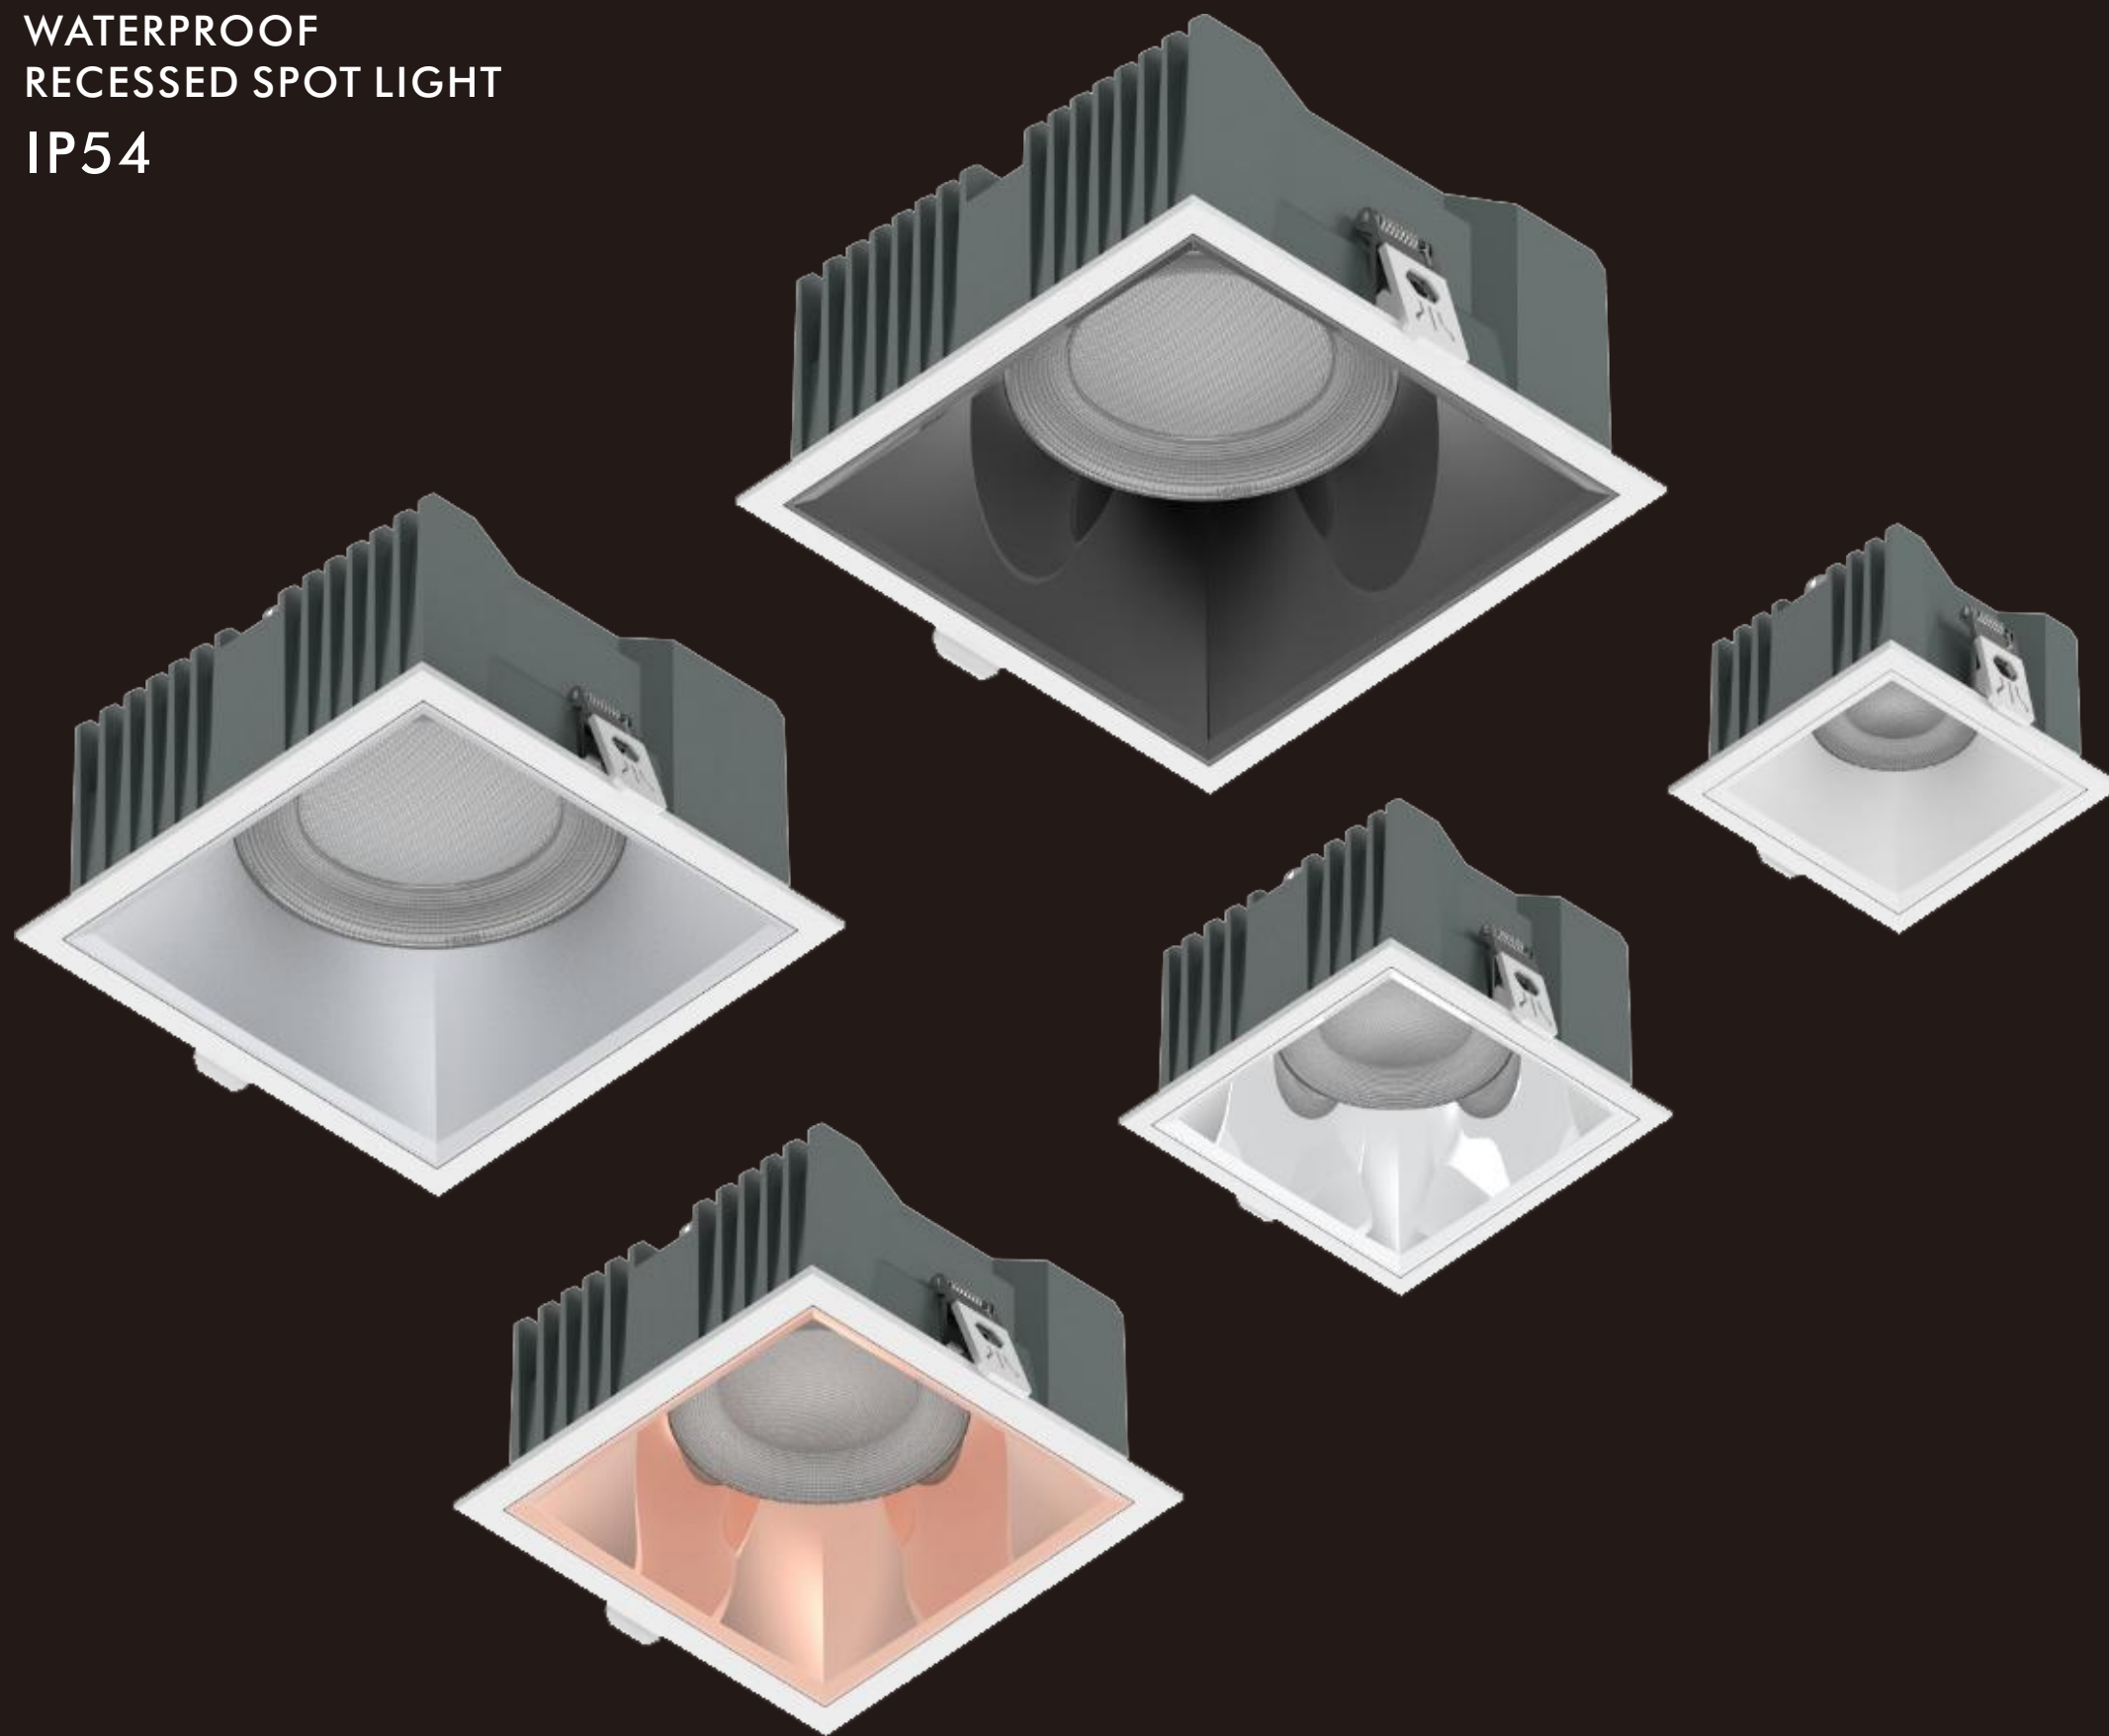

NEOSPOT49

This series stable and dignified, but simple and elegant. Multiple color options, perfect combination of lighting and decoration. 50° , Just the right wide Angle for softer and more uniform lighting.



LED brand:
SANAN

CCT:
2700K/3000K/4000K

CRI:
Ra > 90

Size:
90x90x60

Material:
aluminum

Power:
12W

Voltage & Current:
36V



Cutout:
75x75

Beam angle:
50°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
1200LM



LED brand:
SANAN

CCT:
2700K/3000K/4000K

CRI:
Ra > 90

Size:
110x110x70

Material:
aluminum

Power:
20W

Voltage & Current:
36V



Cutout:
95x95

Beam angle:
50°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
2000LM



LED brand:
SANAN

CCT:
2700K/3000K/4000K

CRI:
Ra > 90

Size:
145x145x75

Material:
aluminum

Power:
30W

Voltage & Current:
36V

Cutout:
125x125

Beam angle:
50°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
2900LM



Matt black



Matt white



Matt silver




Gun black



Shiny silver







LED brand:
SANAN

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
165x165x85

Material:
aluminum

Power:
36W

Voltage & Current:
36V


Cutout:
145x145

Beam angle:
50°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
3900LM





LED brand:
SANAN

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
185x185x92

Material:
aluminum

Power:
45W

Voltage & Current:
36V

Cutout:
165x165

Beam angle:
50°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
5000LM

-
- Matt blackMatt whiteMatt silverGun blackShiny sliver















NEOSPOT49







surface

These series stable and dignified, but simple and elegant.
Multiple color options, perfect combination of lighting and
decoration, 50° ,
Just the right wide Angle for softer and more uniform lighting.

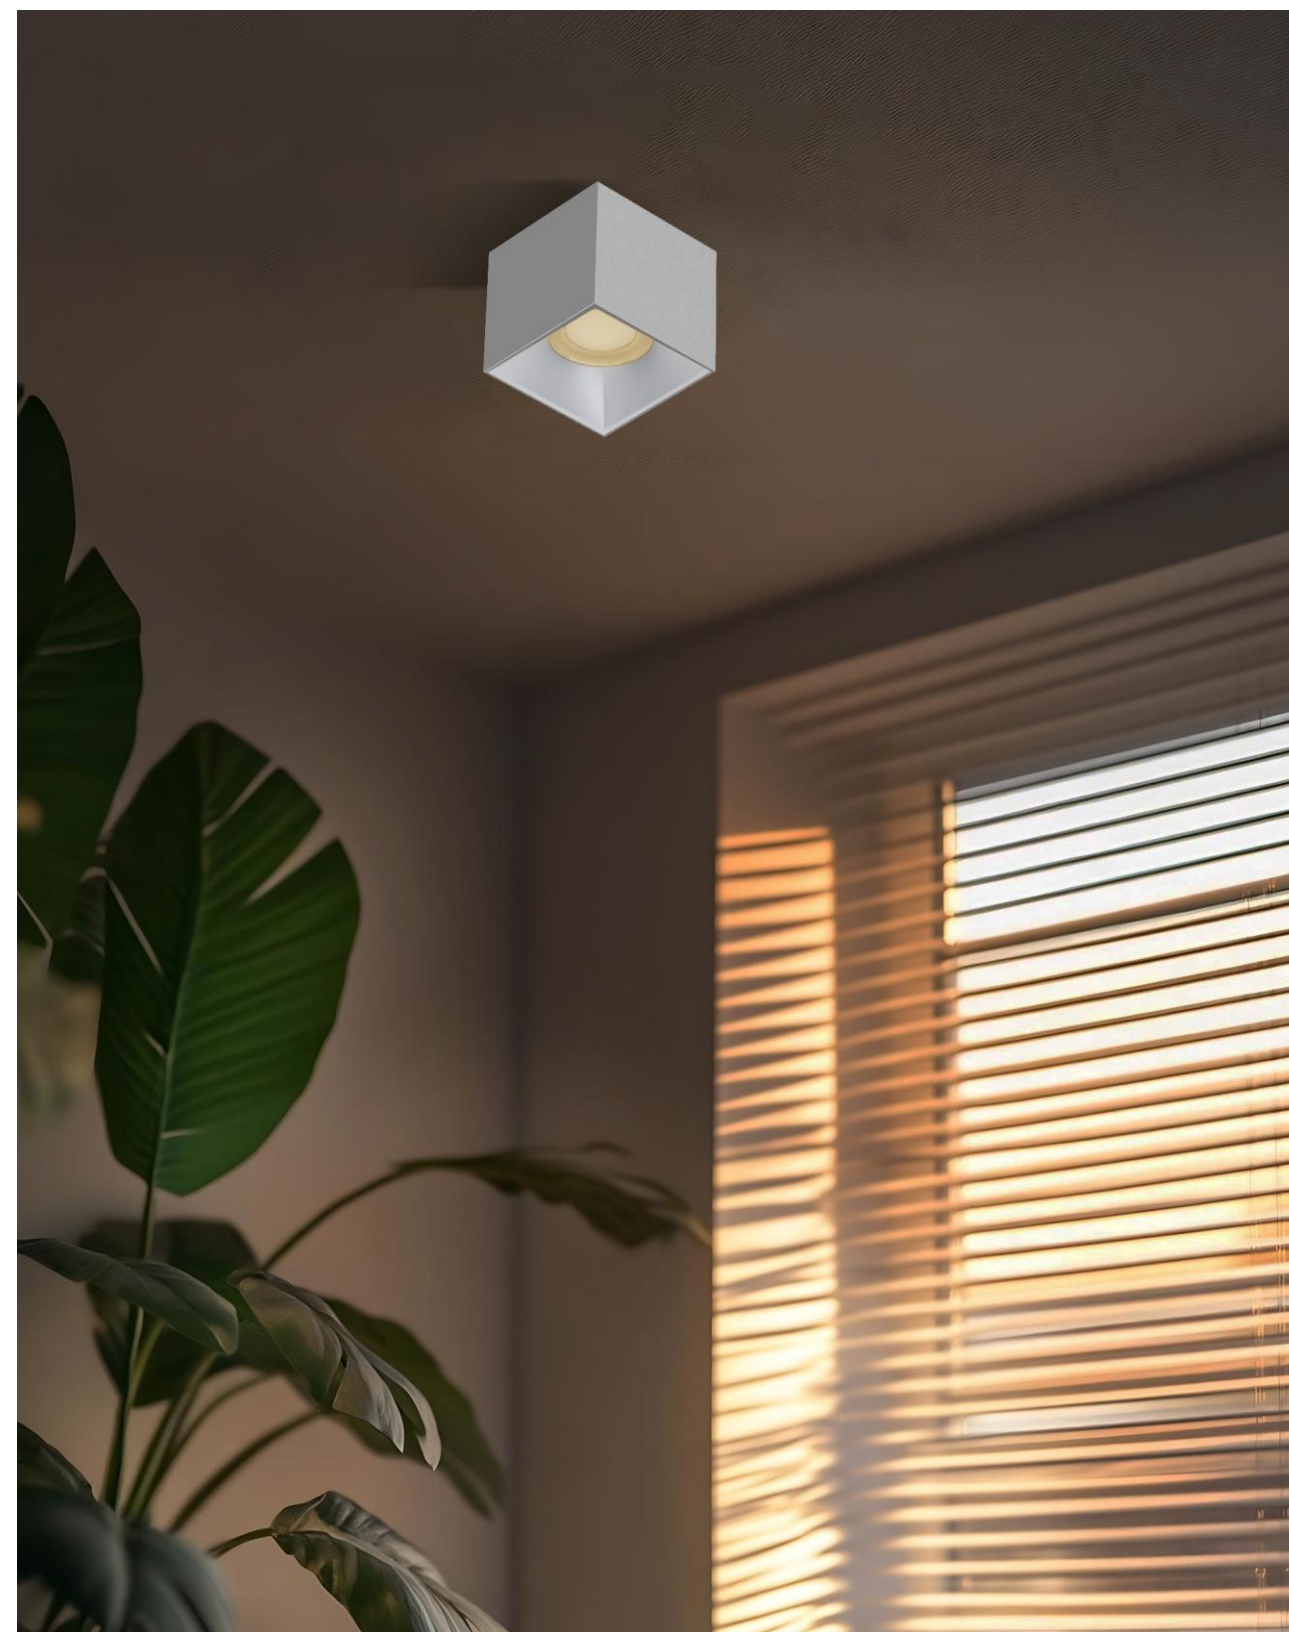

NEOSPOT49
surface


			LED brand: SANAN	Material: aluminum	Beam angle: 50°
			CCT: 2700K/3000K/4000K	Power: 12W	Mains voltage: 220-240V 50/60Hz
			CRI: Ra>90	Voltage & Current: 36V	Description: Downlight
			Size: 80x80x83	Cutout: /	Luminousflux: 1200LM
			LED brand: SANAN	Material: aluminum	Beam angle: 50°
			CCT: 2700K/3000K/4000K	Power: 20W	Mains voltage: 220-240V 50/60Hz
			CRI: Ra>90	Voltage & Current: 36V	Description: Downlight
			Size: 100x100x96	Cutout: /	Luminousflux: 2000LM
			LED brand: SANAN	Material: aluminum	Beam angle: 50°
			CCT: 2700K/3000K/4000K	Power: 30W	Mains voltage: 220-240V 50/60Hz
			CRI: Ra>90	Voltage & Current: 36V	Description: Downlight
			Size: 130x130x96	Cutout: /	Luminousflux: 2900LM
					

			LED brand: SANAN	Material: aluminum	Beam angle: 50°
			CCT: 2700K/3000K/4000K	Power: 36W	Mains voltage: 220-240V 50/60Hz
			CRI: Ra>90	Voltage & Current: 36V	Description: Downlight
			Size: 150x150x136	Cutout: \	Luminousflux: 3900LM
			LED brand: SANAN	Material: aluminum	Beam angle: 50°
			CCT: 2700K/3000K/4000K	Power: 45W	Mains voltage: 220-240V 50/60Hz
			CRI: Ra>90	Voltage & Current: 36V	Description: Downlight
			Size: 170x170x156	Cutout: /	Luminousflux: 5000LM
					

VERO28

Take light as a poem, let the lamp into the darkness,
leaving only a bunch of "self-expression"
The design is to make the lamp disappear and make the
light become the monologue of the space.







LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ51x79

Material:
aluminum

Power:
5W

Voltage & Current:
36V


Cutout:
Φ45

Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
300LM





LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ61x80

Material:
aluminum

Power:
7W

Voltage & Current:
36V


Cutout:
Φ55

Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
400LM





LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ71x81

Material:
aluminum

Power:
9W

Voltage & Current:
36V


Cutout:
Φ65

Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
600LM





LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ82x93

Material:
aluminum

Power:
12W

Voltage & Current:
36V

Cutout:
Φ75

Beam angle:
24°/36°


Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
800LM



white





LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ92x97

Material:
aluminum

Power:
15W

Voltage & Current:
36V


Cutout:
Φ85

Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
930LM





LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ103x105

Material:
aluminum

Power:
20W

Voltage & Current:
36V

Cutout:
Φ95

Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
1400LM



white



STELLA84







These series breaks the limits of traditional LED luminescence to achieve high lumen.







Microcore hides rays of light, illuminates every corner
“worth seeing”

With the chip as the core, let the light penetrate the dark corner and be the illuminator in the space.





			LED brand: SANAN CCT: 2700K/3000K/4000K CRI: Ra>90 Size: Φ89x45	Material: aluminum Power: 12W Voltage & Current: 36V Cutout: Φ75	Beam angle: 55° Mains voltage: 220-240V 50/60Hz Description: Downlight Luminousflux: 1300LM
			LED brand: SANAN CCT: 2700K/3000K/4000K CRI: Ra>90 Size: Φ110x48	Material: aluminum Power: 20W Voltage & Current: 36V Cutout: Φ95	Beam angle: 70° Mains voltage: 220-240V 50/60Hz Description: Downlight Luminousflux: 2300LM
			LED brand: SANAN CCT: 2700K/3000K/4000K CRI: Ra>90 Size: Φ140x52	Material: aluminum Power: 30W Voltage & Current: 36V Cutout: Φ125	Beam angle: 80° Mains voltage: 220-240V 50/60Hz Description: Downlight Luminousflux: 3300LM
					

			LED brand: SANAN CCT: 2700K/3000K/4000K CRI: Ra>90 Size: Φ165x52	Material: aluminum Power: 35W Voltage & Current: 36V Cutout: Φ145	Beam angle: 85° Mains voltage: 220-240V 50/60Hz Description: Downlight Luminousflux: 4000LM
			LED brand: SANAN CCT: 2700K/3000K/4000K CRI: Ra>90 Size: Φ185x57	Material: aluminum Power: 40W Voltage & Current: 36V Cutout: Φ165	Beam angle: 90° Mains voltage: 220-240V 50/60Hz Description: Downlight Luminousflux: 5000LM
			LED brand: SANAN CCT: 2700K/3000K/4000K CRI: Ra>90 Size: Φ235x59	Material: aluminum Power: 45W Voltage & Current: 36V Cutout: Φ200	Beam angle: 90° Mains voltage: 220-240V 50/60Hz Description: Downlight Luminousflux: 5900LM
					







LUXEDGE36



It is a two-way resonance between light and architecture,
people and environment.



series products are very rich, simple fashion style,
designed different kinds of light,
3.5W to 12W power, suitable for different lighting needs,
mask square, round,
The lamp design suitable for different levels. Meet the high
requirements of the lighting scene.











			LED brand: OSRAM	Material: aluminum	Beam angle: 24°/36°
			CCT: 2700K/3000K/4000K	Power: 3.5W	Mains voltage: 220-240V 50/60Hz
			CRI: Ra > 90	Voltage & Current: 36V	Description: Downlight
			Size: Φ41x67	Cutout: Φ35	Luminousflux: 230LM
● black ● white ● white+black					

			LED brand: OSRAM	Material: aluminum	Beam angle: 24°/36°
			CCT: 2700K/3000K/4000K	Power: 3.5W	Mains voltage: 220-240V 50/60Hz
			CRI: Ra > 90	Voltage & Current: 36V	Description: Downlight
			Size: Φ41x67	Cutout: Φ35	Luminousflux: 230LM
● black ● white ● Plating color					

			LED brand: OSRAM	Material: aluminum	Beam angle: 24°/36°
			CCT: 2700K/3000K/4000K	Power: 3.5W	Mains voltage: 220-240V 50/60Hz
			CRI: Ra > 90	Voltage & Current: 36V	Description: Downlight
			Size: Φ41x67	Cutout: Φ35	Luminousflux: 200LM
● black ● white ● white+black					


			LED brand: OSRAM	Material: aluminum	Beam angle: 24°/36°
			CCT: 2700K/3000K/4000K	Power: 3.5W	Mains voltage: 220-240V 50/60Hz
			CRI: Ra > 90	Voltage & Current: 36V	Description: Downlight
			Size: Φ41x67	Cutout: Φ35	Luminousflux: 180LM
● black ● white ● white+black					



									● black ○ white ◐ white+black LED brand: OSRAM CCT: 2700K/3000K/4000K CRI: Ra>90 Size: Φ51x70			Material: aluminum Power: 5W Voltage & Current: 36V Cutout: Φ45			Beam angle: 24°/36° Mains voltage: 220-240V 50/60Hz Description: Downlight Luminousflux: 350LM		
									● black ○ white ● Plating color LED brand: OSRAM CCT: 2700K/3000K/4000K CRI: Ra>90 Size: Φ51x70			Material: aluminum Power: 5W Voltage & Current: 36V Cutout: Φ45			Beam angle: 24°/36° Mains voltage: 220-240V 50/60Hz Description: Downlight Luminousflux: 350LM		
									● black ○ white ◐ white+black LED brand: OSRAM CCT: 2700K/3000K/4000K CRI: Ra>90 Size: Φ51x70			Material: aluminum Power: 5W Voltage & Current: 36V Cutout: Φ45			Beam angle: 24°/36° Mains voltage: 220-240V 50/60Hz Description: Downlight Luminousflux: 280LM		
									● black ○ white ◐ white+black LED brand: OSRAM CCT: 2700K/3000K/4000K CRI: Ra>90 Size: Φ51x70			Material: aluminum Power: 5W Voltage & Current: 36V Cutout: Φ45			Beam angle: 24°/36° Mains voltage: 220-240V 50/60Hz Description: Downlight Luminousflux: 230LM		

LUXEDGE36







LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ60X56



Material:
aluminum

Power:
7W

Voltage & Current:
36V


Cutout:
Φ55

Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
480LM





LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ60X56



Material:
aluminum

Power:
7W

Voltage & Current:
36V


Cutout:
Φ55

Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
480LM





LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ60X56



Material:
aluminum

Power:
7W

Voltage & Current:
36V


Cutout:
Φ55

Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
230LM





LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ60X56



Material:
aluminum

Power:
7W

Voltage & Current:
36V


Cutout:
Φ55

Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
230LM

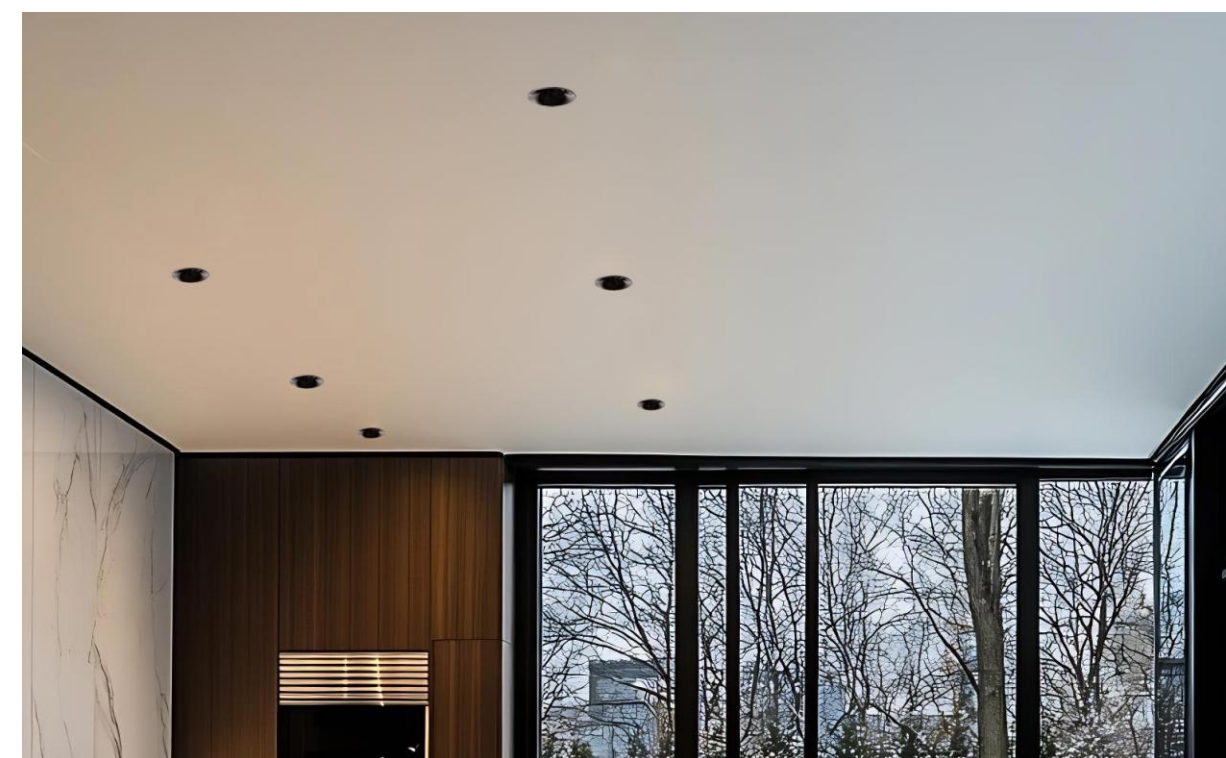

● black

○ white

◐ white+black

LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ80x62

Material:
aluminum

Power:
12W

Voltage & Current:
36V

Cutout:
Φ75

Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
900LM

051

● black

○ white

◐ white+black

LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ80x62

Material:
aluminum

Power:
12W

Voltage & Current:
36V

Cutout:
Φ75

Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
900LM

● black

○ white

● Plating color

LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ80x62

Material:
aluminum

Power:
12W

Voltage & Current:
36V

Cutout:
Φ75

Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
900LM

● black

○ white

◐ white+black

LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ80x62

Material:
aluminum

Power:
12W

Voltage & Current:
36V

Cutout:
Φ75

Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
700LM

● black

○ white

◐ white+black

LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
Φ80x62

Material:
aluminum

Power:
12W

Voltage & Current:
36V

Cutout:
Φ75

Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz



Description:
Downlight

Luminousflux:
700LM


052



LUXEDGE36
square

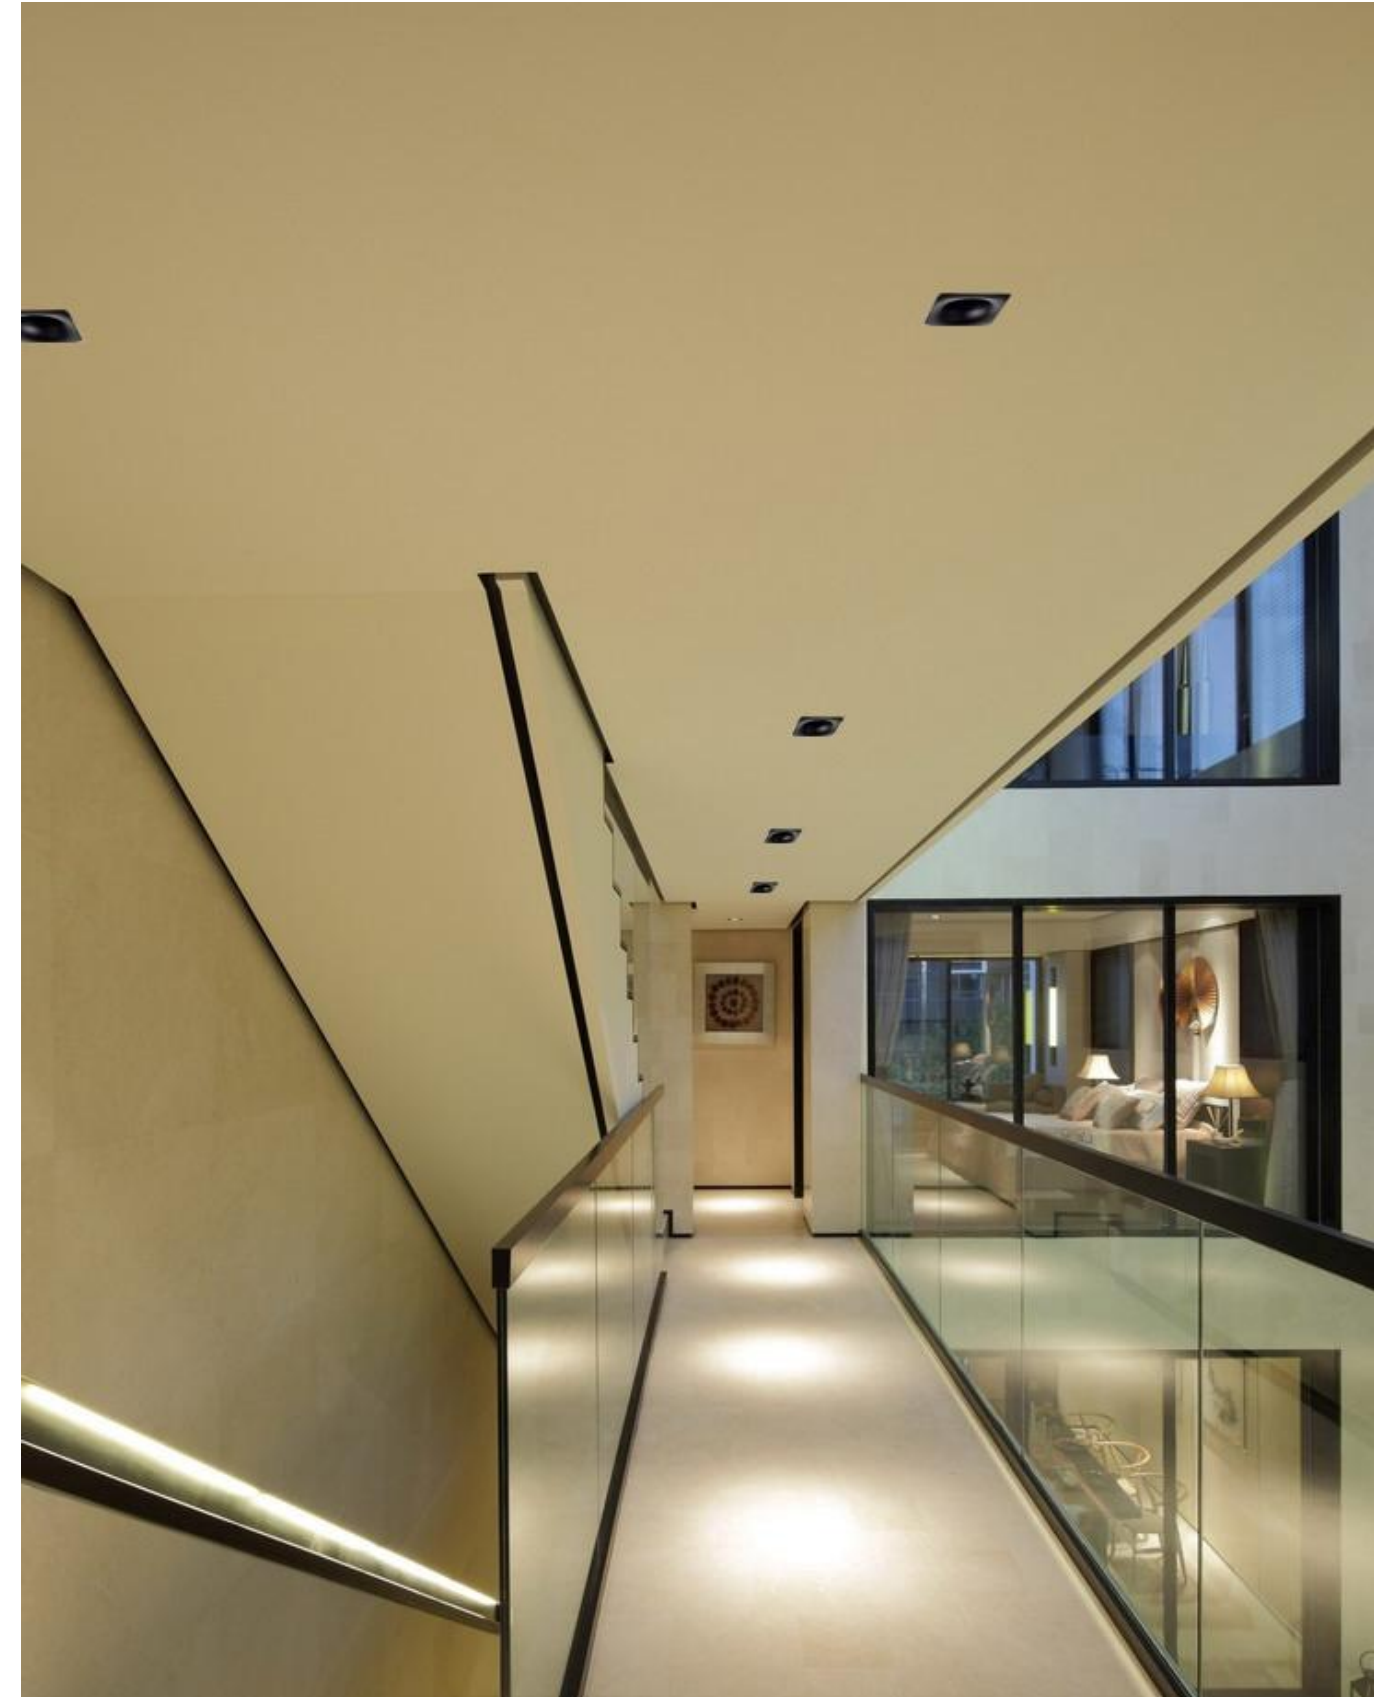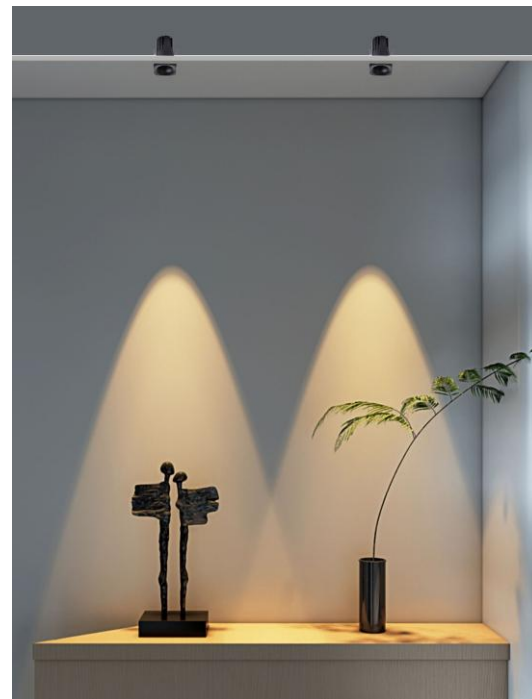

LUXEDGE36
square





LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
41x41x69

Material:
aluminum

Power:
3.5W

Voltage & Current:
36V

Cutout:
Φ35


Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
230LM







LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
41x78x69

Material:
aluminum

Power:
3.5Wx2

Voltage & Current:
36V

Cutout:
35*68


Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
230LM*2







LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
51x51x71

Material:
aluminum

Power:
5W

Voltage & Current:
36V

Cutout:
Φ45


Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
350LM







LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
51x98x71

Material:
aluminum

Power:
5Wx2

Voltage & Current:
36V

Cutout:
45x88


Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
350LM*2







LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
62x62x56

Material:
aluminum

Power:
7W

Voltage & Current:
36V

Cutout:
Φ55


Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
450LM







LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
62x118x56

Material:
aluminum

Power:
7Wx2

Voltage & Current:
36V

Cutout:
55x103


Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
450LM*2







LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
88x88x65

Material:
aluminum

Power:
12W

Voltage & Current:
36V

Cutout:
Φ75


Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz

Description:
Downlight

Luminousflux:
900LM







LED brand:
OSRAM

CCT:
2700K/3000K/4000K

CRI:
Ra>90

Size:
62x118x56

Material:
aluminum

Power:
12Wx2

Voltage & Current:
36V

Cutout:
75x141

Beam angle:
24°/36°

Mains voltage:
220-240V 50/60Hz



Description:
Downlight

Luminousflux:
900LM*2



CRISPLIGHT39



This series breaking through physical boundaries with technology, Let each light have both power and temperature."
Extremely narrow frame, simple fashion, 12W high power suitable for more space
High heat dissipation, more durable lamps.



LED brand: OSRAM
CCT: 2700K/3000K/4000K
CRI: Ra>90
Size: Φ82x80

Material: aluminum
Power: 12W
Voltage & Current: 36V
Cutout: Φ75
Beam angle: 24°/36°
Mains voltage: 220-240V 50/60Hz
Description: Downlight
Luminousflux: 820LM

black white white+black



LED brand: OSRAM
CCT: 2700K/3000K/4000K
CRI: Ra>90
Size: 82x82x80

Material: aluminum
Power: 12W
Voltage & Current: 36V
Cutout: 75x75
Beam angle: 24°/36°
Mains voltage: 220-240V 50/60Hz
Description: Downlight
Luminousflux: 820LM

black white white+black

