



# 2024-2025

Nelux Architectural Lighting Products  
Whatsapp: +852 5349 0724  
sales@nelux.com.hk  
www.nelux.com.hk

Head office: China, HK, Wanchai,  
Central Plaza, 18 Harbour road, 32/F, Office 3208  
Workhouse: China, HK, Tuen Mun, Sun Hing Industrial Building, 22 Kin Fat Street, 11th Floor

Tel:+852 28600042  
Fax:+852 28600066  
WeChat: neluxury

NELUX ARCHITECTURAL LIGHTING - ARCHITECTURAL GARDEN LIGHTING 2024-2025



# GARDEN LIGHTING

## Lawns Spike lights Wall washers

ARCHITECTURAL GARDEN LIGHTING

nelux

Producing your dreams



nelux

PRODUCING YOUR DREAMS

Do you need Bespoke Lighting?  
¿Necesita productos a medida?

NELUX BESPOKE LIGHT  
NELUX PRODUCTOS A MEDIDA

SMART

---

MODERN

FORM

+

LONG

LIFESPAN

+

LIGHTING

SOLUTIONS

# ABOUT US

14 years ago a group of us bonded together with the bright idea to bring unique design and top quality led lighting system to market. All for architectural and commercial lighting products reflect the core of modularity, convenience and affordability.

Nelux a tech-style luminaire firm that focuses on innovation. These innovation based on our deep cooperation with lighting designers, we know what you need, we know how to bring a better lighting in your space.

Working with us comes with some awesome perks

## INNOVATIVE TECHNOLOGY:

With years deep communication with designers, We continuously strive to bring the latest lighting components and technological innovations to LED lighting products

## COMPREHENSIVE DATASHEET SUPPORT:

In Nelux, we always think about how to help our customers finish their work, see what we can do for you, Lighting design, IES Files, High resolution photos, You just sent us DWG file, we will work for you with a experience team

## CUSTOMIZATION:

With a wide variety of marketing content from catalogue choose, if customers still need a special or unique design for lighting, our global sales team will work with you to user in a customization lighting solution for your customers.



# GARDEN LIGHT





.....  
NELUX ALREADY FINISHED  
MORE THAN 700 PROJECTS  
WELCOME TO CONTACT US  
FOR LIGHTING DESIGNS

## Nelux Architectural Garden Lighting

INNOVATIVE TECHNOLOGY FOR ARCHITECTURAL LIGHTING



01



**NW-0205/400**

<b>LED Chip</b>	Bridgelux
<b>CRI</b>	>80
<b>Watts</b>	5W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K/6000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT/BLK/Grey
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	L220 W90 H400
<b>Beam Angel</b>	120°




**NW-0205/300**

<b>LED Chip</b>	Bridgelux
<b>CRI</b>	>80
<b>Watts</b>	5W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K/6000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT/BLK/Grey
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	L220 W90 H300
<b>Beam Angel</b>	120°



**Dimensions**







Optical quality and manufacturing quality combine in high-level products: from scrupulous control of metal alloys and processing, to the selection of materials not subject to deterioration, to the use of the latest generation thermal interfaces, reliable, highperformance LEDs and optical trains of utmost optical quality: the technological mastery allows NELUX Architectural lighting to distribute products of the highest quality level.




### Dimensions



### NL-0106-600

<b>LED Chip</b>	Sanan
<b>CRI</b>	>90
<b>Watts</b>	6W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K/6000K
<b>Material</b>	Aluminum+Acrylic
<b>Color</b>	WHT/BLK
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	L150 W95 H600
<b>Beam Angel</b>	120°



### NL-0106-800


<b>LED Chip</b>	Sanan
<b>CRI</b>	>90
<b>Watts</b>	6W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K/6000K
<b>Material</b>	Aluminum+Acrylic
<b>Color</b>	WHT/BLK
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	L150 W95 H800
<b>Beam Angel</b>	120°








**Dimensions**

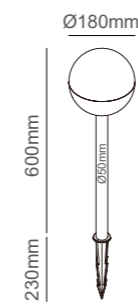

NL-0206-600

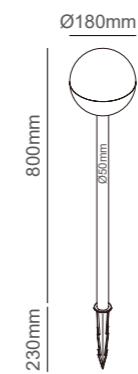

NL-0206-800



**NL0206**

<b>LED Chip</b>	Sanan
<b>CRI</b>	>90
<b>Watts</b>	22W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K/6000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT/BLK+Grey
<b>Waterproof Rate</b>	IP54
<b>Beam Angel</b>	180°





04  
IP65

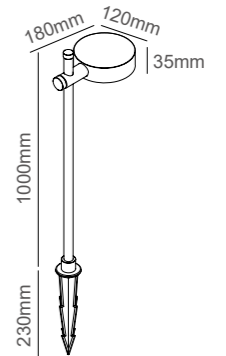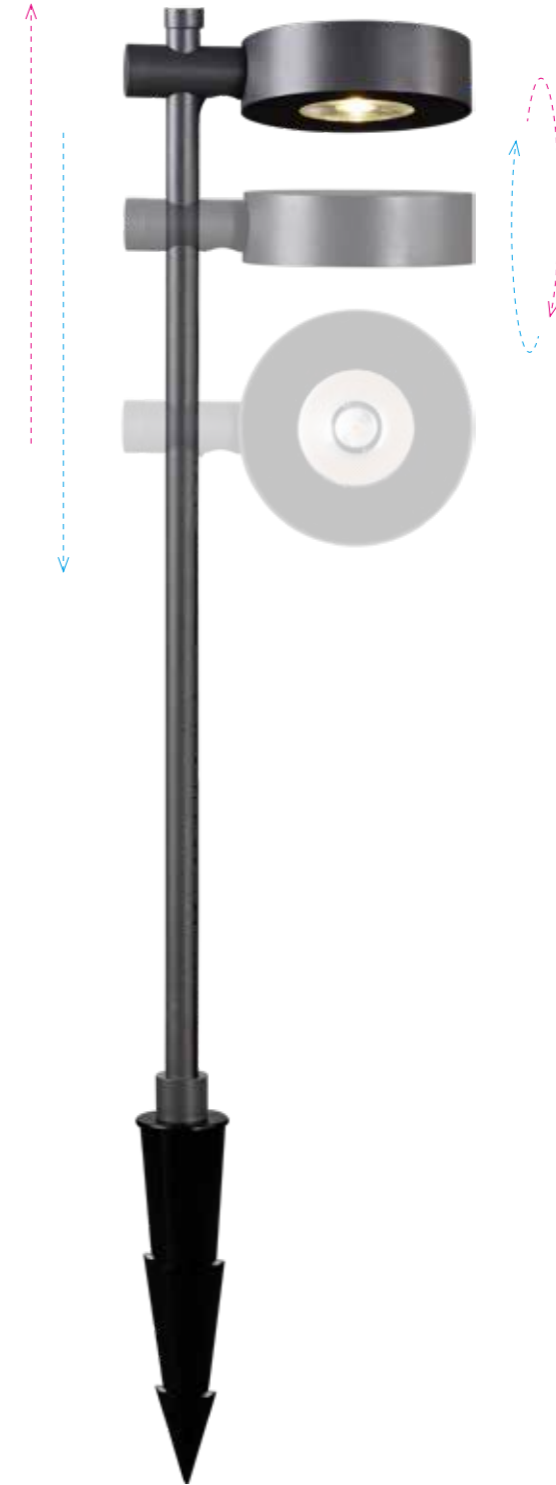


|| NS-0207

LED Chip	CREE
CRI	>90
Watts	7W
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum
Color	WHT/BLK/Grey
Waterproof Rate	IP65
Beam Angel	70°



# 05

IP65

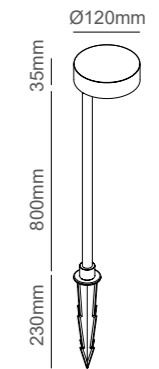

## NS-0208


LED Chip	CREE
CRI	>90
Watts	7W
Voltage	110-220V
Color Temperature	3000K/4000K
Material	Aluminum
Color	WHT/BLK/Grey
Waterproof Rate	IP65
Beam Angel	24°







Dimensions

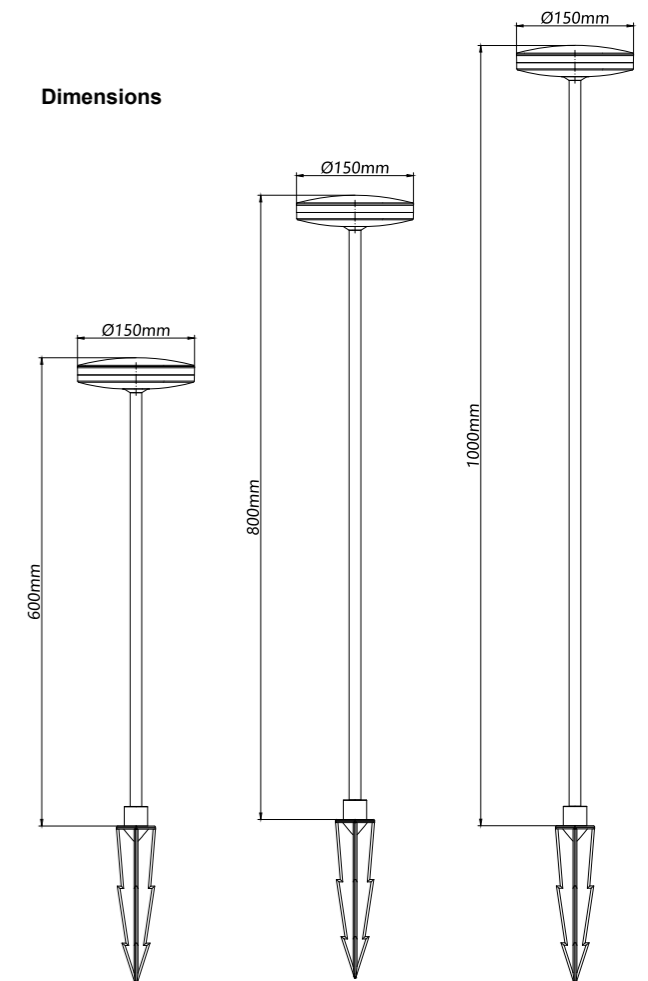


Item No.	Lamp	Watts	K	CRI	Lumens	IP	Material	Input
NS-0210	LED	12W	3000K	90+	880lm	54	Aluminum	AC220~240V/DC12~24V







Dimensions

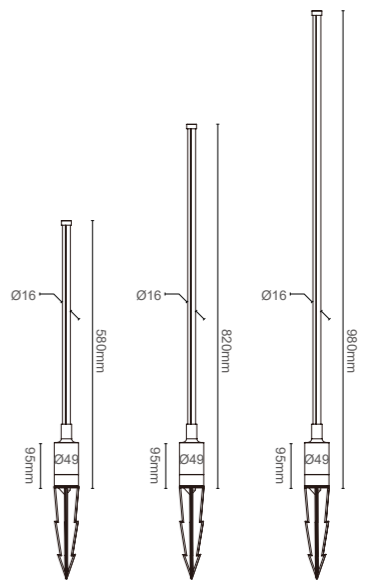

**NS-0209/600 /800 /1000**

<b>LED Chip</b>	Sanan
<b>CRI</b>	>90
<b>Watts</b>	6W /10W /12W
<b>Voltage</b>	AC110~240V/DC12
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT /BLK /GREY
<b>Waterproof Rate</b>	IP54
<b>Beam Angel</b>	120°









**Dimensions**

Ø26mm

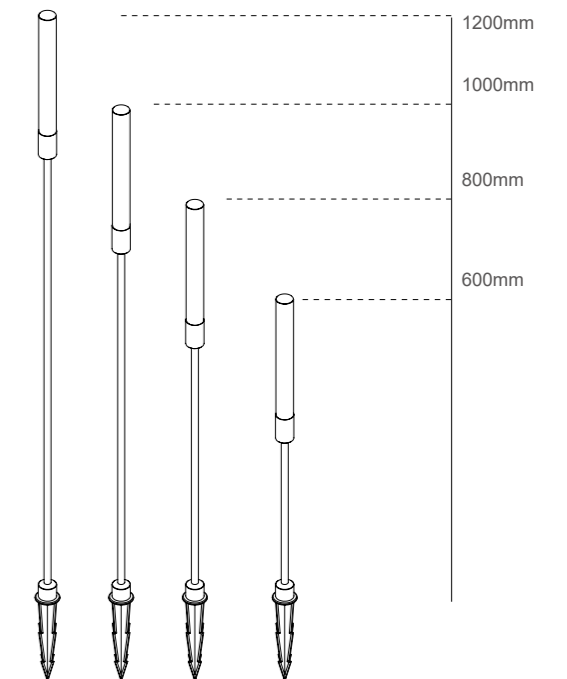


Item No.	Lamp	Watts	K	CRI	Lumens	IP	Input
NS-0219	LED	3W	3000K	90+	195lm	65	DC24V



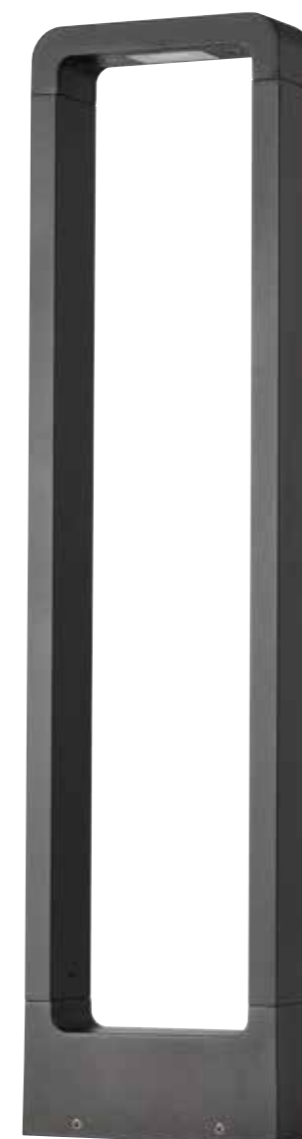

Dimensions

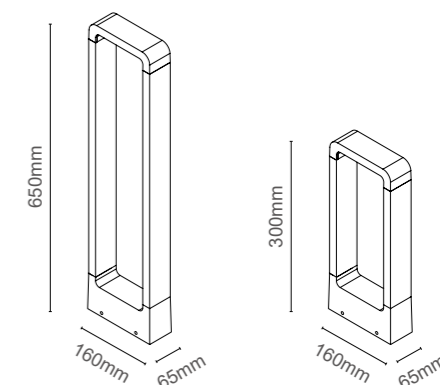

NS-0212/300 /600

<b>LED Chip</b>	Brigelux
<b>CRI</b>	>90
<b>Watts</b>	7W
<b>Voltage</b>	110-240V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	White/Black/Grey
<b>Waterproof Rate</b>	IP65
<b>Beam Angel</b>	120°






10



**Dimensions**

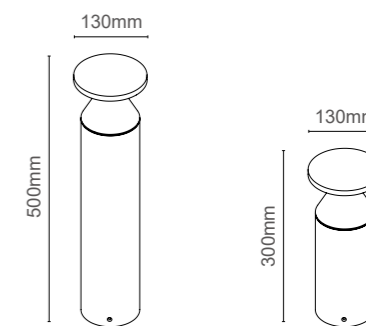

**NS-0211/300 /500**


<b>LED Chip</b>	Sanna
<b>CRI</b>	>90
<b>Watts</b>	12W
<b>Voltage</b>	110-240V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	White/Black/Grey
<b>Waterproof Rate</b>	IP65







**Dimensions**

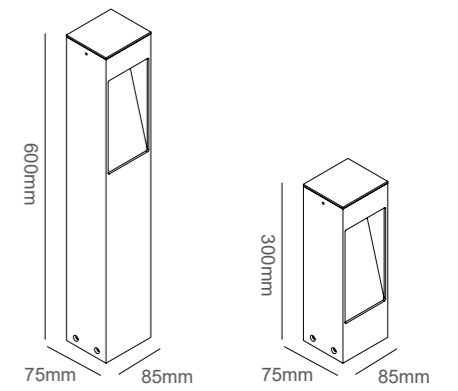


Item No.	Lamp	Watts	K	CRI	Lumens	IP	Input
NS-0218-300	LED	7W	3000K	90+	230lm	65	AC220~240V
NS-0218-600	LED	7W	3000K	90+	230lm	65	AC220~240V







Dimensions

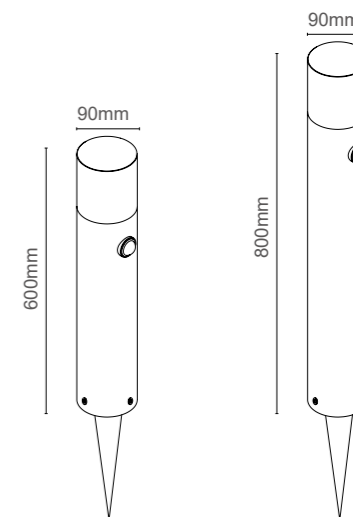

NS-S081-600/800



<b>LED Chip</b>	Sanna
<b>CRI</b>	>90
<b>Watts</b>	10W
<b>Voltage</b>	110-240V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	White/Black/Grey
<b>Waterproof Rate</b>	IP65







**Dimensions**

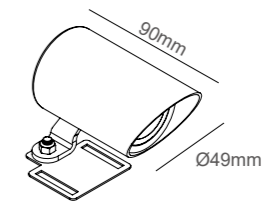


Item No.	Lamp	Watts	K	Beam Angle	CRI	Lumens	IP	Input
NS-0215-B	LED	3W	3000K	30°/50°	90+	295lm	65	DC24V
NS-0216-B	LED	7W	3000K	30°/50°	90+	460lm	65	DC24V




14



Dimensions

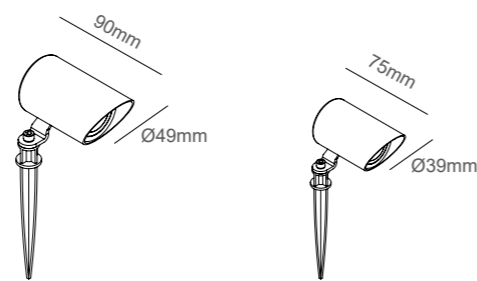


Dimensions

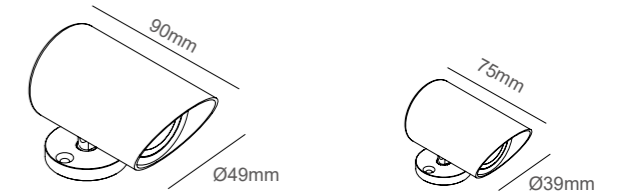

Item No.	Lamp	Watts	K	Beam Angle	CRI	Lumens	IP	Input
NS-0215-A	LED	3W	3000K	30°/50°	90+	295lm	65	DC24V
NS-0216-A'	LED	7W	3000K	30°/50°	90+	460lm	65	DC24V

Item No.	Lamp	Watts	K	Beam Angle	CRI	Lumens	IP	Input
NS-0215-C	LED	3W	3000K	30°/50°	90+	295lm	65	DC24V
NS-0216-C	LED	7W	3000K	30°/50°	90+	460lm	65	DC24V






15



Dimensions




NW-086

<b>LED Chip</b>	Sanan
<b>CRI</b>	>90
<b>Watts</b>	10W
<b>Voltage</b>	110-240V
<b>Color Temperature</b>	3000K/4000K/6000K
<b>Material</b>	Aluminum
<b>Color</b>	White/Black/Grey
<b>Waterproof Rate</b>	IP65
<b>Size (MM)</b>	W90 H280 D100



Dimensions



NW-S086


<b>LED Chip</b>	Sanan
<b>CRI</b>	>90
<b>Watts</b>	10W
<b>Voltage</b>	110-240V
<b>Color Temperature</b>	3000K/4000K/6000K
<b>Material</b>	Aluminum
<b>Color</b>	White/Black/Grey
<b>Waterproof Rate</b>	IP65
<b>Size (MM)</b>	W90 H280 D100







Dimensions

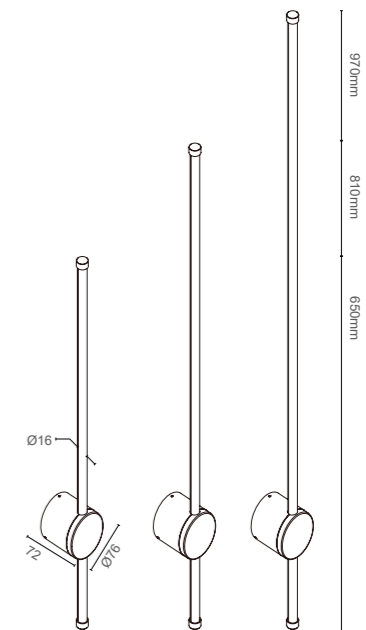

NW-068/600 /800 /1000

<b>LED Chip</b>	Sanan
<b>CRI</b>	>90
<b>Watts</b>	12W /14W /20W
<b>Voltage</b>	110~240V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT /BLK /GREY
<b>Waterproof Rate</b>	IP54
<b>Beam Angel</b>	120°








NW-S007



NW-007



Dimensions



NW-S007

<b>LED Chip</b>	Sanan
<b>CRI</b>	>90
<b>Watts</b>	20W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT/BLK/GREY
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W212 H100 D167
<b>Beam Angel</b>	350° adjustable



NW-007

<b>LED Chip</b>	Sanan
<b>CRI</b>	>90
<b>Watts</b>	20W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT/BLK/GREY
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W212 H100 D167
<b>Beam Angel</b>	350° adjustable






18



Dimensions




**NW-025**

<b>LED Chip</b>	EPISTAR
<b>CRI</b>	>90
<b>Watts</b>	20W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT/BLK/GREY
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W178 H160 D170
<b>Beam Angel</b>	355° adjustable



Dimensions



**NW-023**


<b>LED Chip</b>	Sanan
<b>CRI</b>	>90
<b>Watts</b>	20W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT/BLK/GREY
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W160 H160 D206
<b>Beam Angel</b>	355° adjustable







Dimensions




**NW-S025**

<b>LED Chip</b>	Sanan
<b>CRI</b>	>90
<b>Watts</b>	20W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT/BLK/GREY
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W178 H160 D170
<b>Beam Angel</b>	355° adjustable



Dimensions



**NW-S023**


<b>LED Chip</b>	Sanan
<b>CRI</b>	>90
<b>Watts</b>	20W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT/BLK/GREY
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W160 H160 D206
<b>Beam Angel</b>	355° adjustable







**Dimensions**

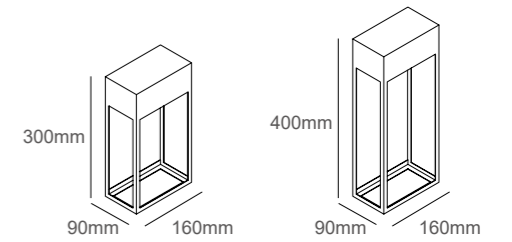


Item No.	Lamp	Watts	K	CRI	Lumens	IP	Input
NW-095-300	LED	20W	3000K	80+	1500lm	65	AC220~240V
NW-095-400	LED	20W	3000K	80+	1500lm	65	AC220~240V





**Dimensions**




Item No.	Lamp	Watts	K	CRI	Lumens	IP	Input
NW-093	LED	36W	3000K	90+	2450lm	65	AC220~240V







Dimensions



NW-A310/2


<b>LED Chip</b>	Bridgelux
<b>CRI</b>	>80
<b>Watts</b>	24W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT/BLK/GREY
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W200 H100 D100
<b>Beam Angel</b>	0~120° adjustable








**Dimensions**




Item No.	Lamp	Watts	K	CRI	Lumens	IP	Dimensions	Material	Input
NW-1026	LED	6W	3000K	90+	450lm	65	D142 H130 W80	Aluminum	AC220~240V





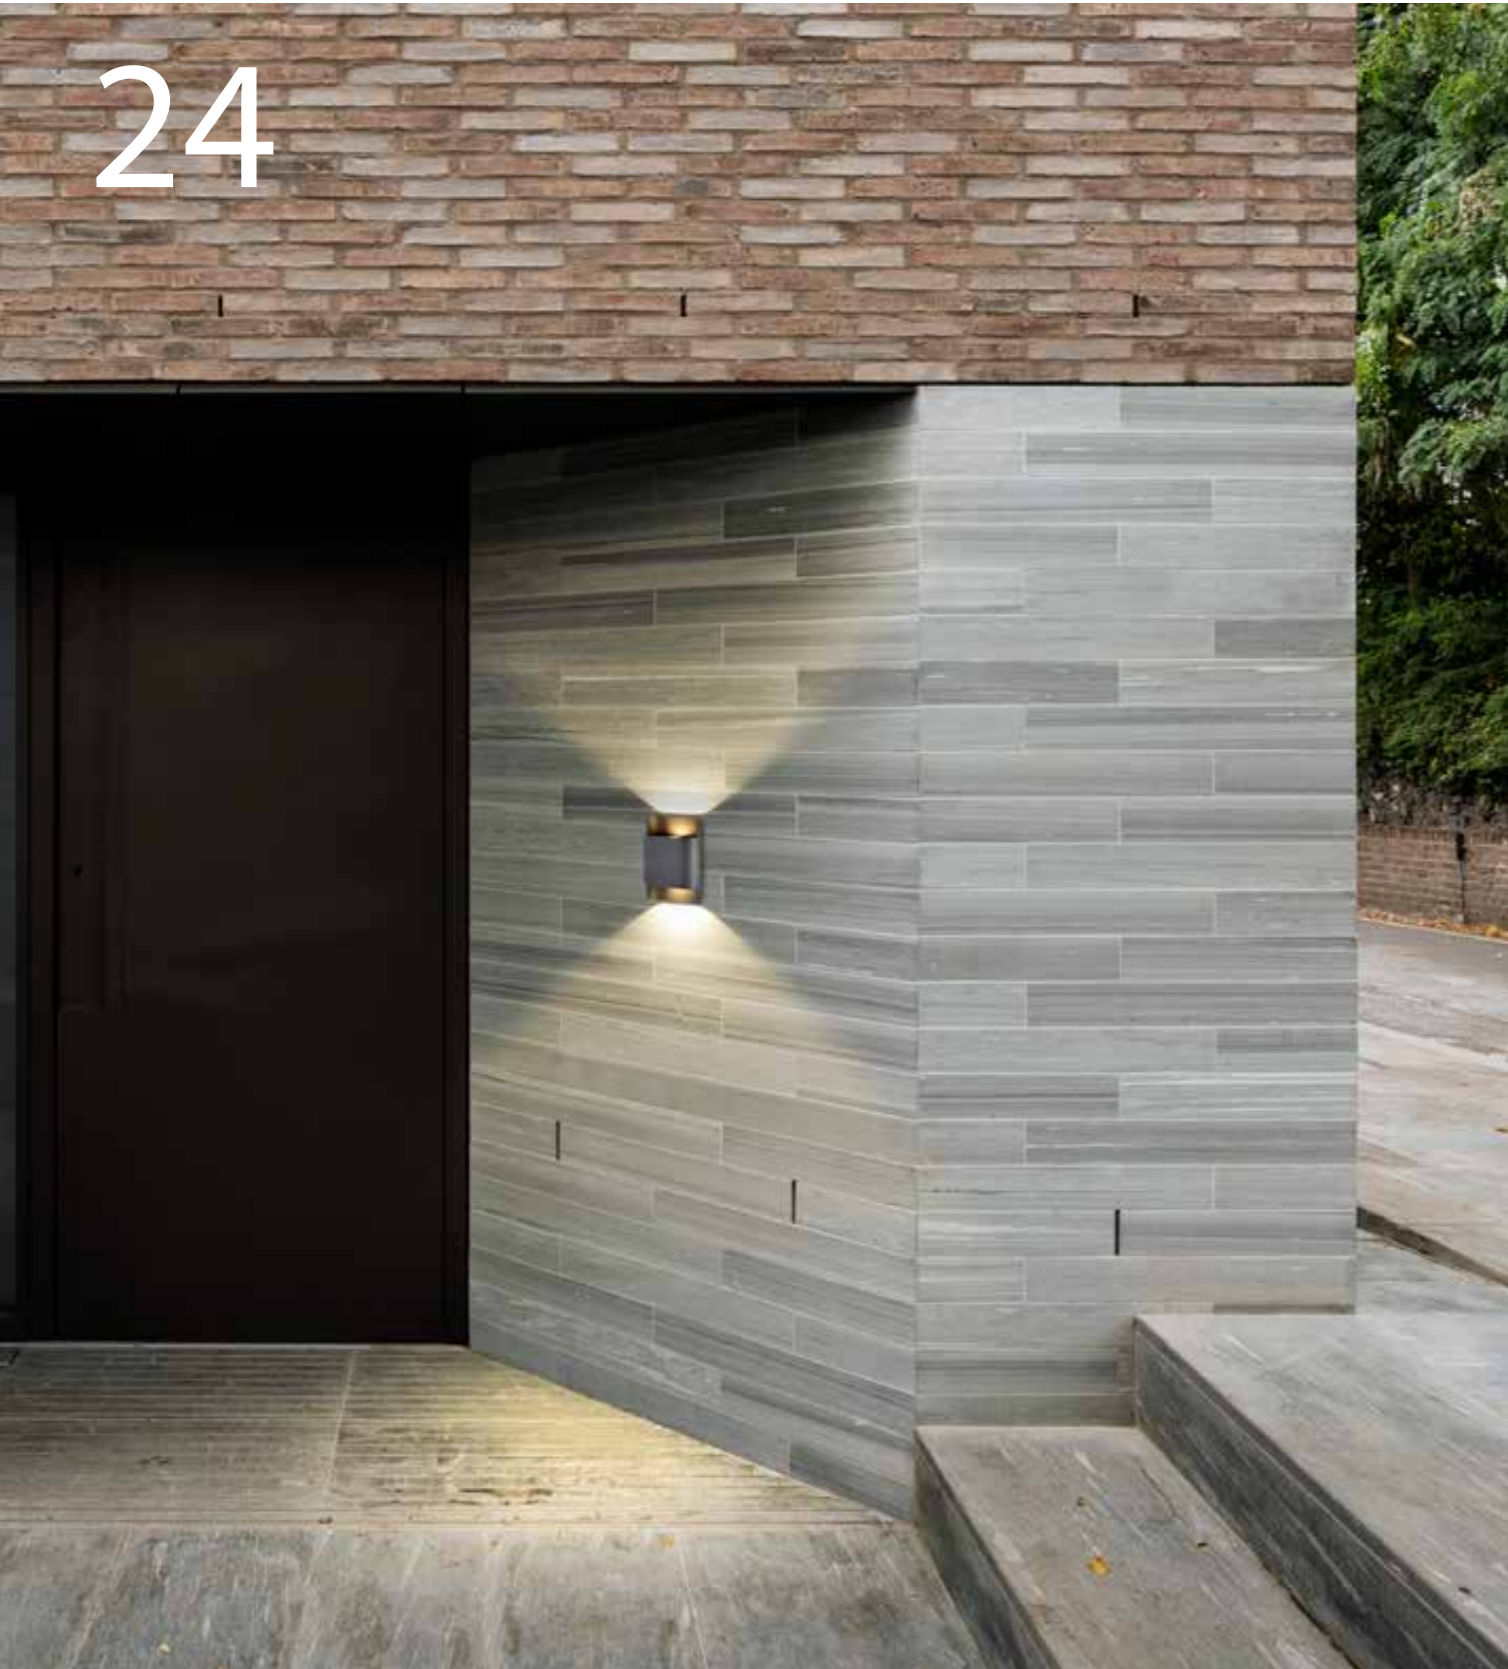

Dimensions




NW-011

<b>LED Chip</b>	Bridgelux
<b>CRI</b>	>80
<b>Watts</b>	10W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT/BLK/GREY
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W132 H180 D55
<b>Beam Angel</b>	120°



Dimensions




NW-8610


<b>LED Chip</b>	Bridgelux
<b>CRI</b>	>80
<b>Watts</b>	10W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K/6000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT/BLK+GOLD
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W104 H200 D92
<b>Beam Angel</b>	120°





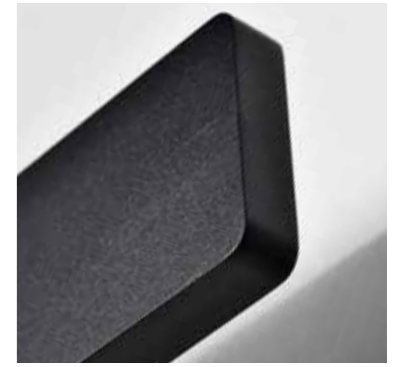


Dimensions




Item No.	Lamp	Watts	K	CRI	Lumens	IP	Dimensions	Material	Input
NW-1058-1000	LED	18W	3000K	90+	1600lm	65	H52 D12 W1040	Aluminum	AC220~240V
NW-1058-1200	LED	20W	3000K	90+	1900lm	65	H52 D12 W1240	Aluminum	AC220~240V
NW-1058-1500	LED	24W	3000K	90+	2300lm	65	H52 D12 W1440	Aluminum	AC220~240V
NW-1058-1800	LED	28W	3000K	90+	2600lm	65	H52 D12 W1840	Aluminum	AC220~240V



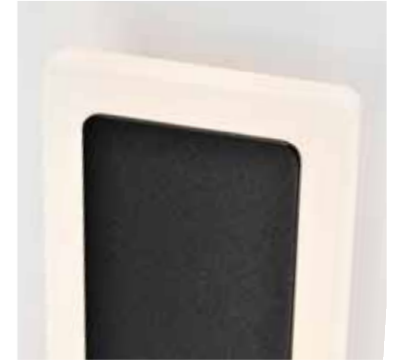


Dimensions

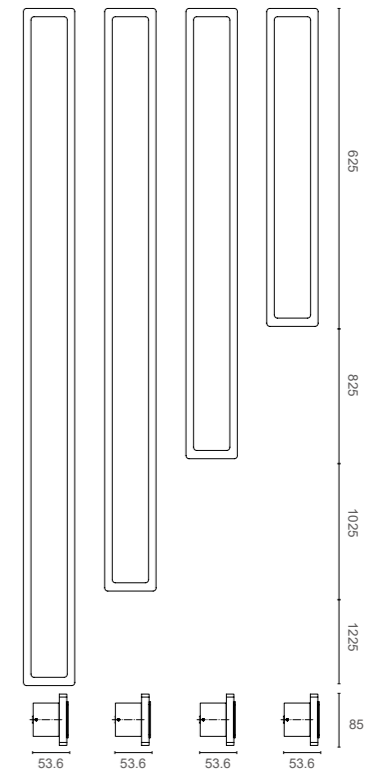

**NW-069/600 /800 /1000 /1200**


<b>LED Chip</b>	Sanan
<b>CRI</b>	>90
<b>Watts</b>	17W /19W /22W /28W
<b>Voltage</b>	110-240V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT /BLK /GREY
<b>Waterproof Rate</b>	IP54
<b>Beam Angel</b>	120°







Dimensions

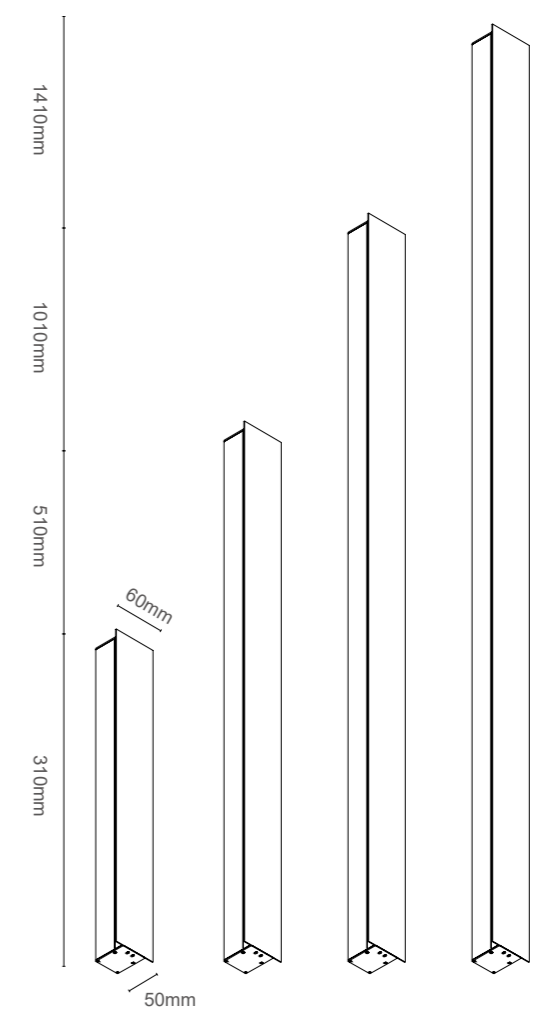

NW-083/300/500/1000/1400



<b>LED Chip</b>	Sanan
<b>CRI</b>	>90
<b>Watts</b>	6W / 10W / 20W / 28W
<b>Voltage</b>	220-240V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	White/Black/Grey
<b>Waterproof Rate</b>	IP54







**Dimensions**





**NW-6805**

<b>LED Chip</b>	Bridgelux
<b>CRI</b>	>80
<b>Watts</b>	6W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT/BLK
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W100 H150 D50
<b>Beam Angel</b>	120°



**Dimensions**




**NW-6806**

<b>LED Chip</b>	Bridgelux
<b>CRI</b>	>80
<b>Watts</b>	6W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT/BLK
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W100 H150 D50
<b>Beam Angel</b>	120°



**Dimensions**



**NW-A807**


<b>LED Chip</b>	CREE
<b>CRI</b>	>80
<b>Watts</b>	6W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT/BLK
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W200 H90 D90
<b>Beam Angel</b>	15°/120°







### Dimensions




### NW-5140

<b>LED Chip</b>	<b>CREE</b>
<b>CRI</b>	>80
<b>Watts</b>	8W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT/BLK
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W220 H90 D48
<b>Beam Angel</b>	150°



### Dimensions



### NW-A820/2


<b>LED Chip</b>	Sanan
<b>CRI</b>	>90
<b>Watts</b>	12W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	BLK/WHT
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W230 H54 D97
<b>Beam Angel</b>	350° adjustable

### NW-A820/1

<b>LED Chip</b>	Sanan
<b>CRI</b>	>90
<b>Watts</b>	6W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	BLK/WHT
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W110 H54 D97
<b>Beam Angel</b>	350° adjustable



### Dimensions



### NW-5130


<b>LED Chip</b>	<b>CREE</b>
<b>CRI</b>	>80
<b>Watts</b>	6W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT/BLK
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W170 H80 D40
<b>Beam Angel</b>	150°







### Dimensions




### NW-8070

<b>LED Chip</b>	CREE
<b>CRI</b>	>80
<b>Watts</b>	6W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K/6000K
<b>Material</b>	Aluminum
<b>Color</b>	BLK/WHT/Grey
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W90 H70 D130
<b>Beam Angel</b>	60°



### Dimensions



### NW-8080


<b>LED Chip</b>	Bridgelux
<b>CRI</b>	>80
<b>Watts</b>	5W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K/6000K
<b>Material</b>	Aluminum
<b>Color</b>	BLK/WHT
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W120 H70 D110
<b>Beam Angel</b>	150°







**Dimensions**




**NW-A131/4**

<b>LED Chip</b>	<b>CREE</b>
<b>CRI</b>	>80
<b>Watts</b>	4W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	BLK/WHT
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W150 H150 D50
<b>Beam Angel</b>	0°



**Dimensions**





**NW-A130/4**


<b>LED Chip</b>	<b>CREE</b>
<b>CRI</b>	>80
<b>Watts</b>	4W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	BLK/WHT
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W150 H150 D50
<b>Beam Angel</b>	0°





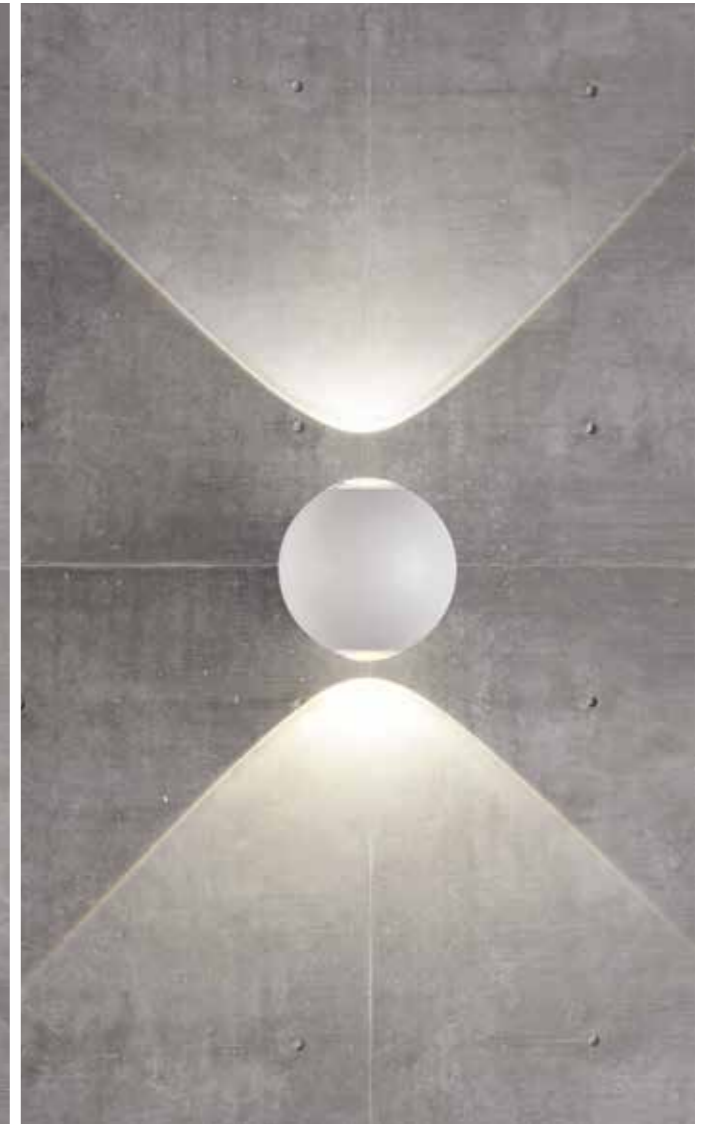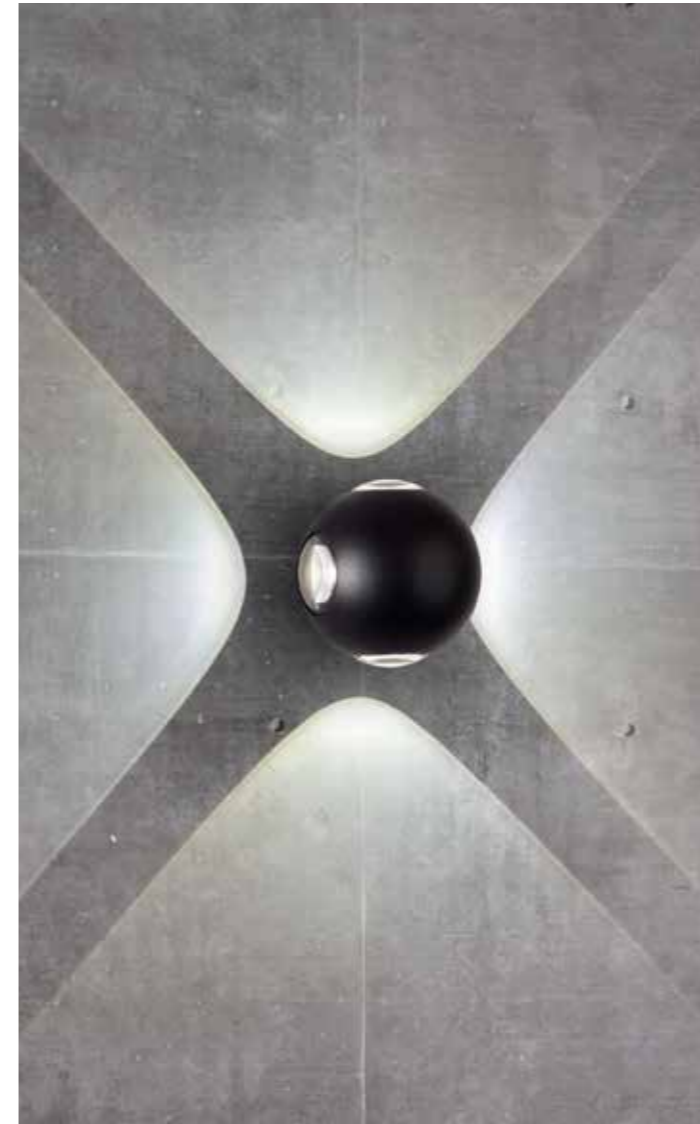

**Dimensions**




**NW-A161/4**

<b>LED Chip</b>	<b>CREE</b>
<b>CRI</b>	>80
<b>Watts</b>	4W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT/BLK
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W110 H112 D93
<b>Beam Angel</b>	90°



**Dimensions**




**NW-A161/2**


<b>LED Chip</b>	<b>CREE</b>
<b>CRI</b>	>80
<b>Watts</b>	6W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT/BLK
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W110 H112 D93
<b>Beam Angel</b>	90°





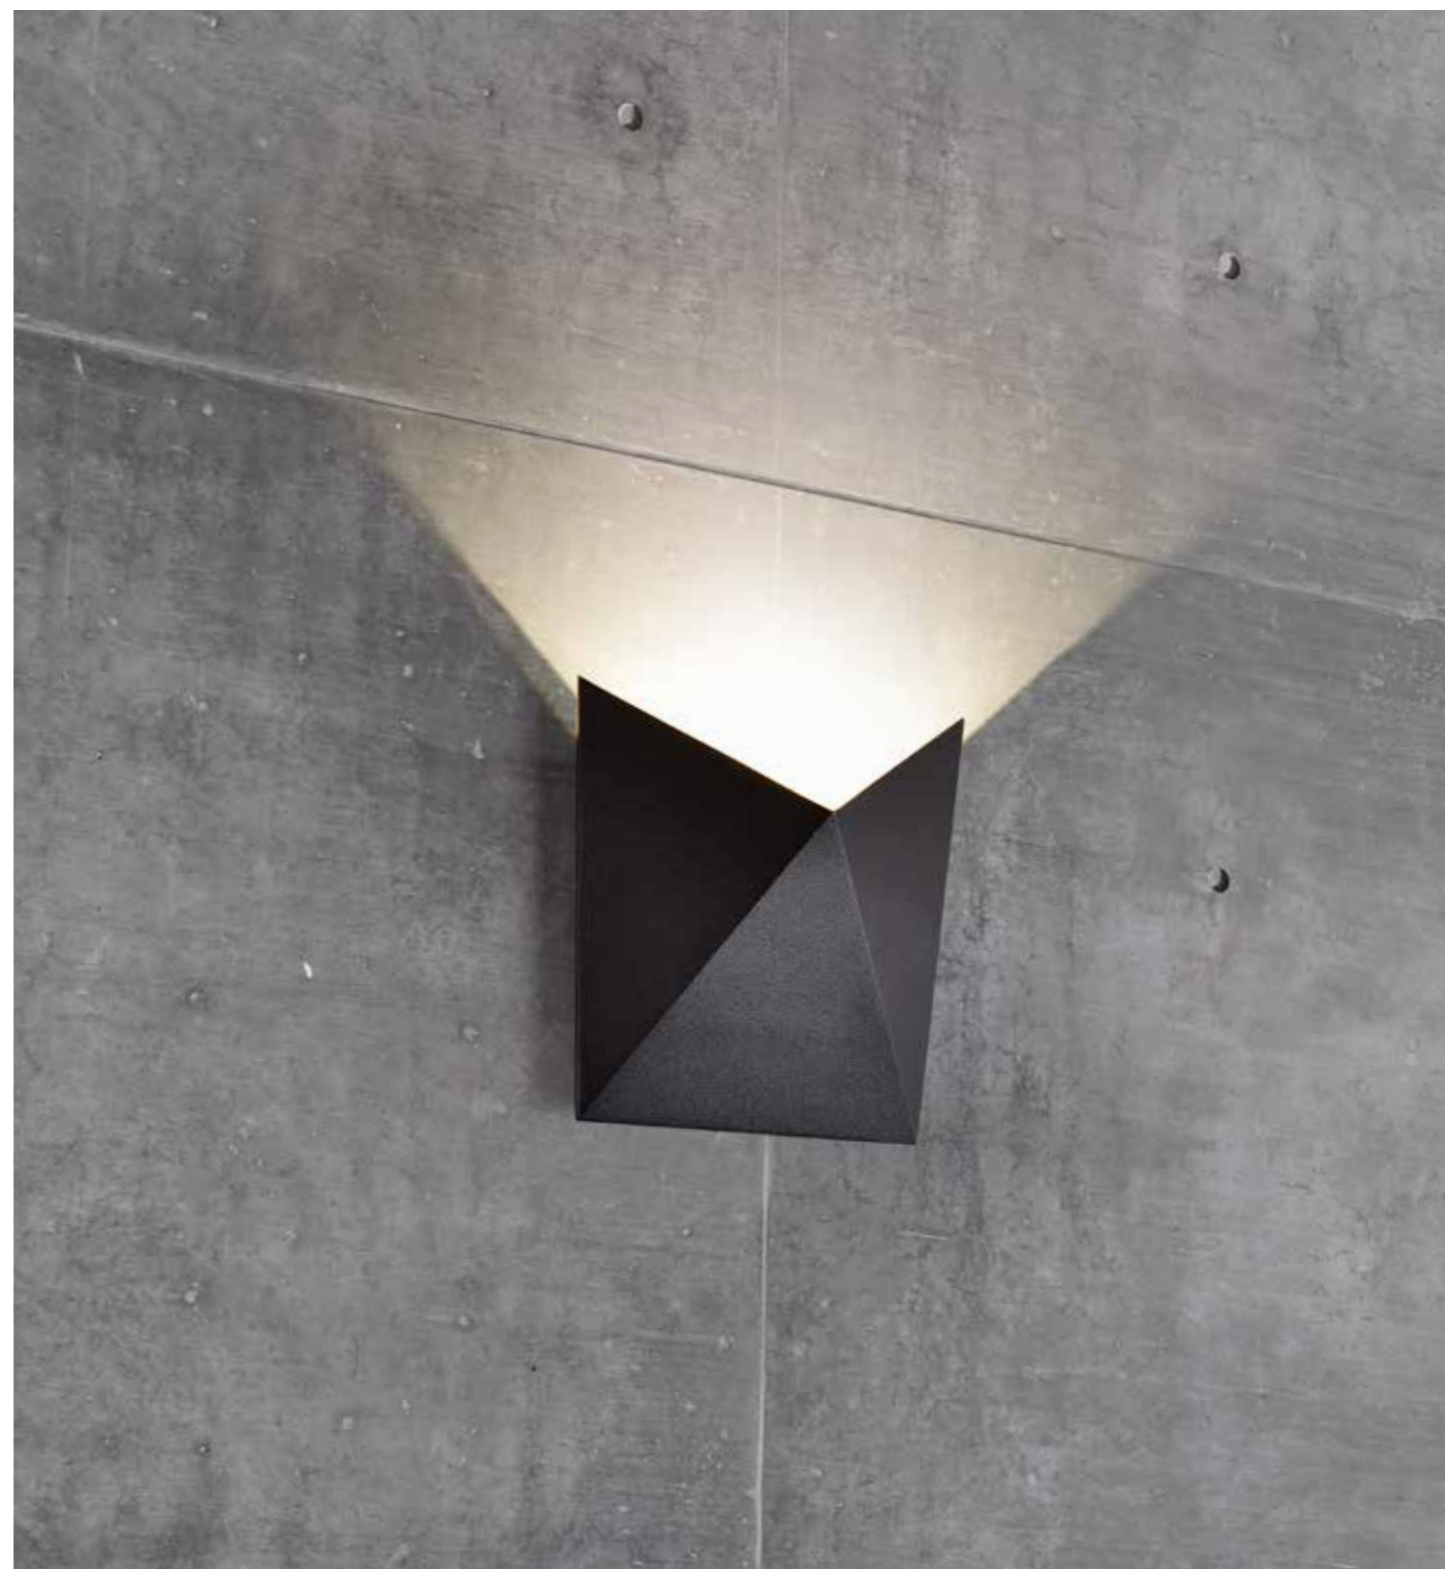

Dimensions



**NW-A816**


<b>LED Chip</b>	Bridgelux
<b>CRI</b>	>80
<b>Watts</b>	7W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	BLK/WHT/Grey
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W170 H170 D75
<b>Beam Angel</b>	100°








**Dimensions**




**NW-A818**

<b>LED Chip</b>	Sanan
<b>CRI</b>	>90
<b>Watts</b>	10W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K/6000K
<b>Material</b>	Aluminum
<b>Color</b>	BLK/WHT/Grey
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W180 H155 D56
<b>Beam Angel</b>	180°

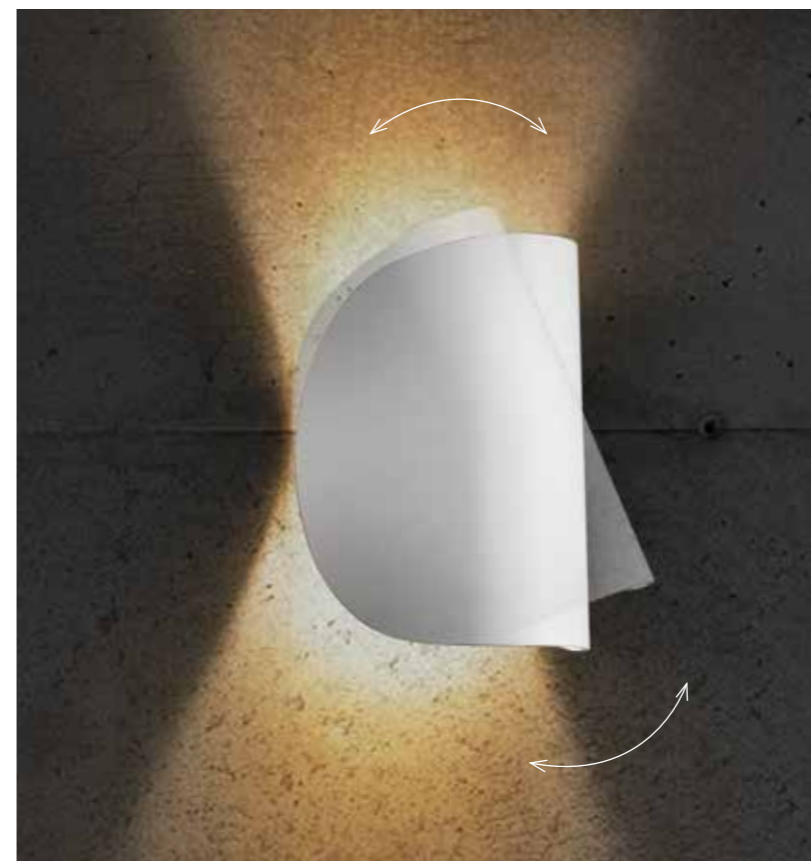

**Dimensions**



**NW-A108**

<b>LED Chip</b>	Bridgelux
<b>CRI</b>	>80
<b>Watts</b>	6W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	WHT/BLK/Grey
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W165 H105 D115
<b>Beam Angel</b>	180° adjustable





Optical quality and manufacturing quality combine in high-level products: from scrupulous control of metal alloys and processing, to the selection of materials not subject to deterioration, to the use of the latest generation thermal interfaces, reliable, highperformance LEDs and optical trains of utmost optical quality: the technological mastery allows NELUX Architectural lighting to distribute products of the highest quality level.





**|| NW-A310**

<b>LED Chip</b>	Bridgelux
<b>CRI</b>	>80
<b>Watts</b>	6W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K/6000K
<b>Material</b>	Aluminum
<b>Color</b>	BLK/WHT/Grey
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W100 H100 D100
<b>Beam Angel</b>	0°~120°

CE   




**|| NW-A310R**

<b>LED Chip</b>	Bridgelux
<b>CRI</b>	>80
<b>Watts</b>	6W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K/6000K
<b>Material</b>	Aluminum
<b>Color</b>	BLK/WHT/Grey
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	W140 H100 D50
<b>Beam Angel</b>	0°~120°

CE   

**Dimensions**








Optical quality and manufacturing quality combine in high-level products: from scrupulous control of metal alloys and processing, to the selection of materials not subject to deterioration, to the use of the latest generation thermal interfaces, reliable, highperformance LEDs and optical trains of utmost optical quality: the technological mastery allows NELUX Architectural lighting to distribute products of the highest quality level.



### Dimensions



### NW-8663/135

<b>LED Chip</b>	Sanan
<b>CRI</b>	>90
<b>Watts</b>	6W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	BLK/WHT/Grey
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	Ø135 D40
<b>Beam Angel</b>	360°



### W-8663/180

<b>LED Chip</b>	Sanan
<b>CRI</b>	>90
<b>Watts</b>	9W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	BLK/WHT/Grey
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	Ø180 D40
<b>Beam Angel</b>	360°



### NW-8663/240

<b>LED Chip</b>	Sanan
<b>CRI</b>	>90
<b>Watts</b>	12W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	BLK/WHT/Grey
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	Ø240 D56
<b>Beam Angel</b>	360°




### NW-8663/300


<b>LED Chip</b>	Sanan
<b>CRI</b>	>90
<b>Watts</b>	15W
<b>Voltage</b>	110-220V
<b>Color Temperature</b>	3000K/4000K
<b>Material</b>	Aluminum
<b>Color</b>	BLK/WHT/Grey
<b>Waterproof Rate</b>	IP54
<b>Size (MM)</b>	Ø300 D71
<b>Beam Angel</b>	360°






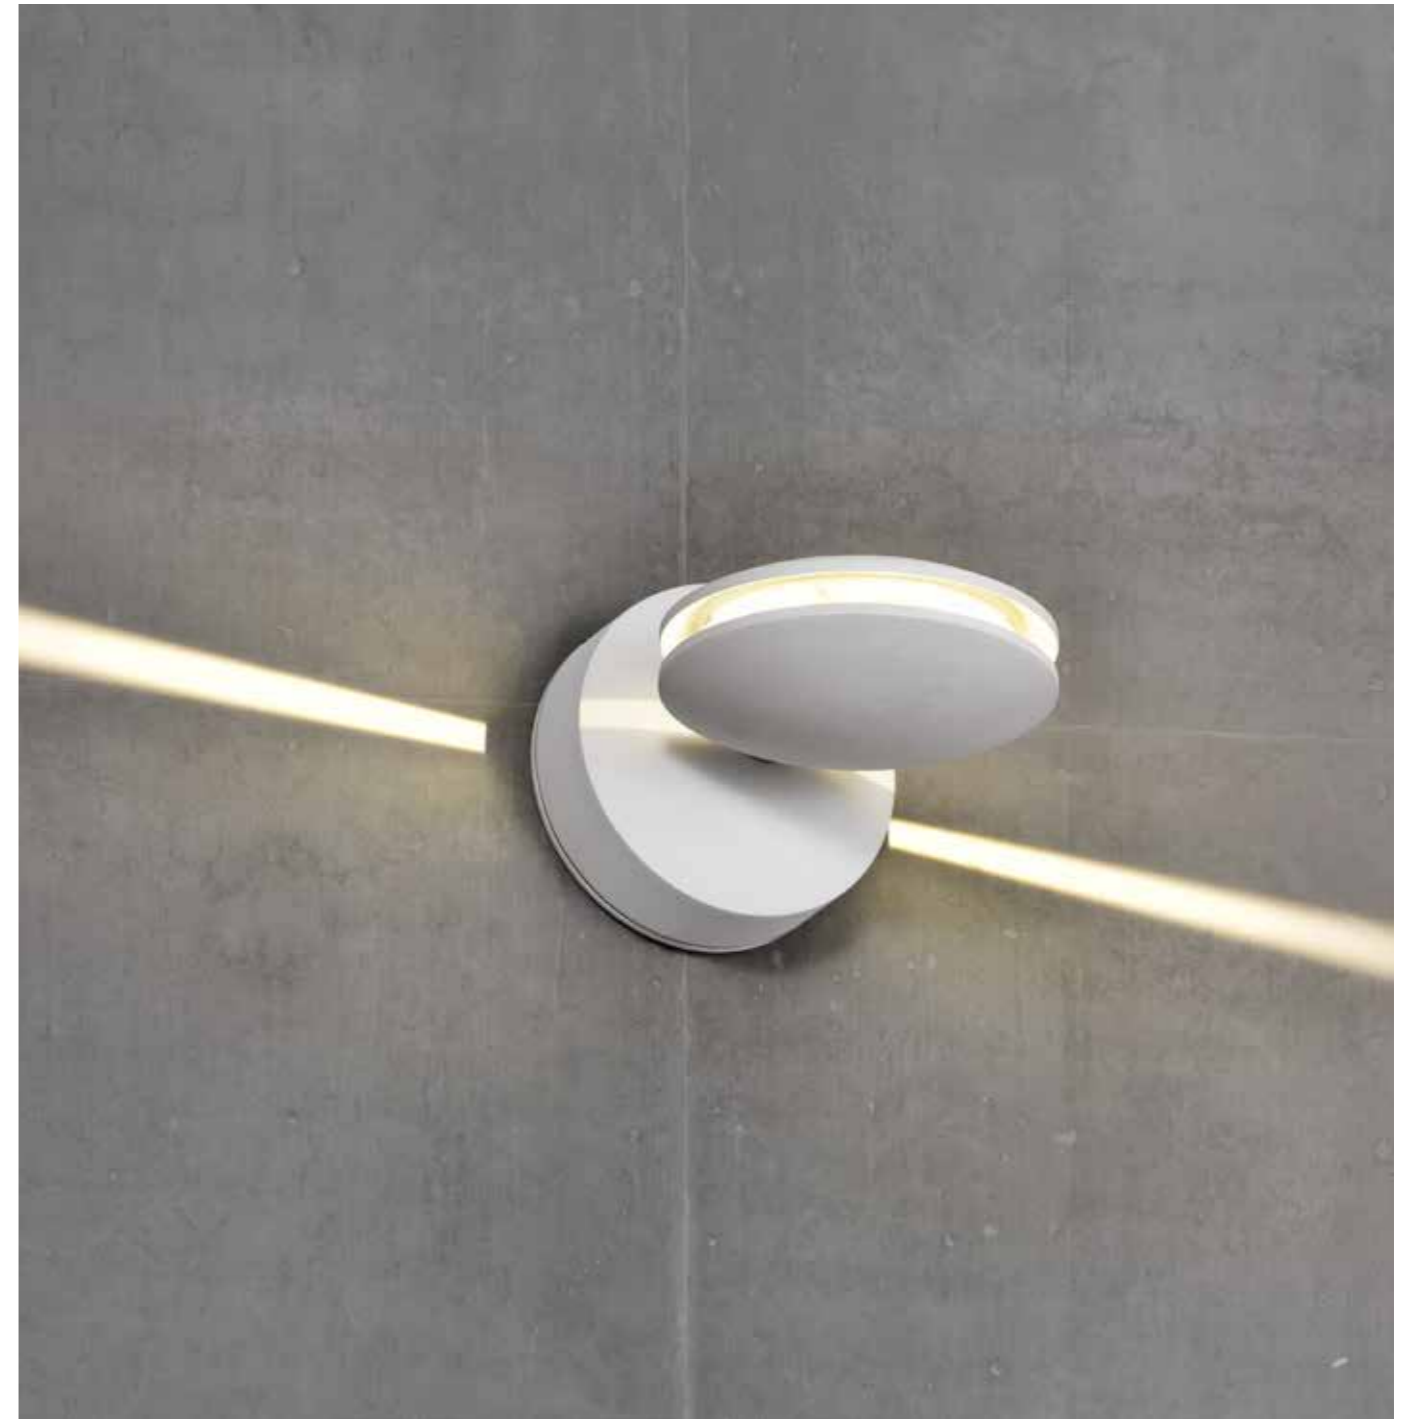

BLK WHT

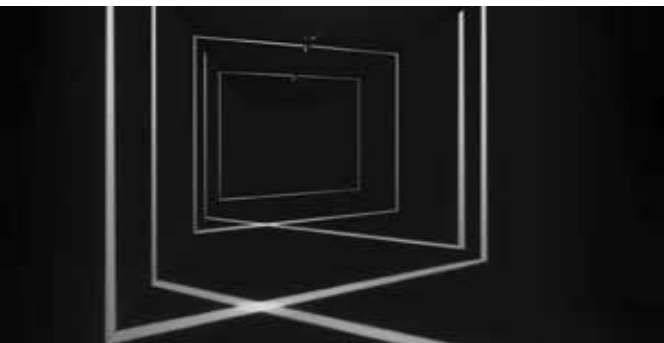

### Dimensions



### NW-A810

LED Chip	CREE
CRI	>80
Watts	7W
Voltage	110-220V
Color Temperature	3000K/4000K/6000K
Material	Aluminum
Color	WHT/BLK
Waterproof Rate	IP54
Size (MM)	W163 H50 D100
Beam Angel	350° adjustable





GARDEN LIGHTING | LAWNS    SPIKE LIGHT    WALL WASHERS

THANK YOU

Nelux Architectural Lighting Products  
Whatsapp: +852 5349 0724  
sales@nelux.com.hk  
www.nelux.com.hk

Head office: China, HK, Wanchai,  
Central Plaza, 18 Harbour road, 32/F, Office 3208  
Workhouse: China, HK, Tuen Mun, Sun Hing Industrial Building, 22 Kin Fat Street, 11th Floor

Tel:+852 28600042  
Fax:+852 28600066  
WeChat: neluxury