


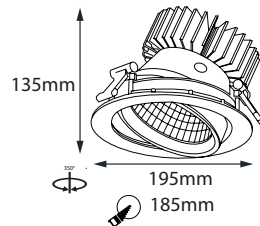

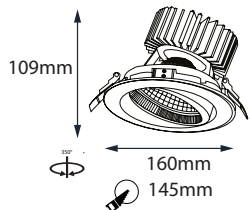


**DW195135**  
 Material Aluminum die-casting, electrostatic powder coating  
 Input Voltage AC220-240V, Multivoltage  
 Light Power 43W, 50W  
 Luminous flux ~3900lm, ~4500lm  
 Light Source Cree  
 CCT 2700K, 3000K, 4000K  
 CRI >80, Optional CRI>90, CRI95, CRI97  
 Beam Angle 12°, 30°, 45°, 55° & 12°, 20°, 36°, 45°, 60°  
 Driver, Khun, Xz, Philips, HEP  
 Dimmable 0-10V, Triac, Dali as an option









**DW140111**  
 Material Aluminum die-casting, electrostatic powder coating  
 Input Voltage AC220-240V, Multivoltage  
 Light Power 18W, 25W  
 Luminous flux ~2000lm, ~2400lm  
 Light Source Cree  
 CCT 2700K, 3000K, 4000K  
 CRI >80, Optional CRI>90, CRI95, CRI97  
 Beam Angle 12°, 24°, 45°, 55°  
 Driver, Khun, Xz, Philips, HEP  
 Dimmable 0-10V, Triac, Dali as an option

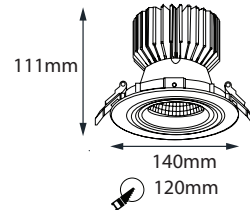

**DW160109**  
 Material Aluminum die-casting, electrostatic powder coating  
 Input Voltage AC220-240V, Multivoltage  
 Light Power 25W, 33W, 40W  
 Luminous flux ~2500lm, ~3500lm, ~4100lm  
 Light Source Cree  
 CCT 2700K, 3000K, 4000K  
 CRI >80, Optional CRI>90, CRI95, CRI97  
 Beam Angle 12°, 30°, 45°, 60°  
 Driver, Khun, Xz, Philips, HEP  
 Dimmable 0-10V, Triac, Dali as an option




**DW14092 DW165125 DW195144**  
 Material Aluminum die-casting, electrostatic powder coating  
 Input Voltage AC220-240V, Multivoltage  
 Light Power 18W - 25W, 33W - 45W  
 Luminous flux ~1800lm - ~2500lm, 3300lm - ~4600lm  
 Light Source Cree  
 CCT 2700K, 3000K, 4000K  
 CRI >80, Optional CRI>90, CRI95, CRI97  
 Beam Angle 15°, 30°, 45°, 55° - 12°, 30°, 45°, 60° - & 12°, 20°, 36°, 45°, 60°  
 Driver, Khun, Xz, Philips, HEP  
 Dimmable 0-10V, Triac, Dali as an option

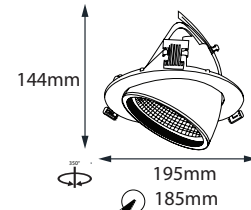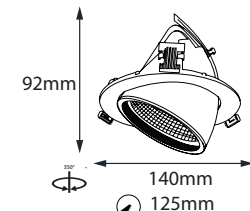


**SHOPY SERIES**



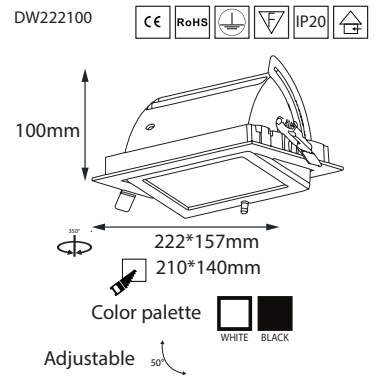

DW17588 DW222100  
 Material Aluminum die-casting, electrostatic powder coating  
 Input Voltage AC220-240V, Multivoltage  
 Light Power 25W, 29W - 32W, 39W  
 Luminous flux ~2500lm, ~3100lm - 3600lm, ~3900lm  
 Light Source Cree  
 CCT 2700K, 3000K, 4000K  
 CRI >80, Optional CRI>90, CRI95, CRI97  
 Beam Angle 90°x60° - 90°x70°  
 & 12°, 20°, 36°, 45°, 60°  
 Driver, Khun, Xz, Philips, HEP  
 Dimmable 0-10V, Triac, Dali as an option

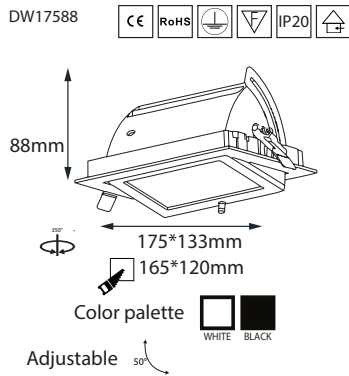

DOWNLIGHT, Shopy series, reference DW160109 25W finished in white color

